



JEMI VALVES



GATE VALVE

132B BRONZE NRS GATE VALVE (THREADED)


- ◆ Pressure Rating:PN20
- ◆ Working Medium:Water,Oil,Steam
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7
- ◆ Comply With BS5154

Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Bonnet	Bronze CC491K	All
3	Stem	DZR Brass CW602N	All
4	Packing Nut	Brass CW614N	All
5	Packing	P.T.F.E	All
6	Stem Bush	DZR Brass CW602N	All
7	Disc	Bronze CC491K	All
8	Handwheel	Aluminium	$\frac{1}{2}'' \sim 2''$
8	Handwheel	Cast iron	$2\frac{1}{2}'' \sim 4''$
9	Handwheel Nut	Brass CW614N	All
10	Gasket	P.T.F.E	$3'' \sim 4''$

Dimensions

132B					
DN	INCH	d	L	H	D
15	$\frac{1}{2}''$	13	43	78	52
20	$\frac{3}{4}''$	19	49	92	60
25	1"	25	54	103	60
32	$1\frac{1}{4}''$	32	62	116	70
40	$1\frac{1}{2}''$	38	65	133	78
50	2"	50	75	156	92
65	$2\frac{1}{2}''$	63	87	190	100
80	3"	76	105	215	110
100	4"	100	124	258	130

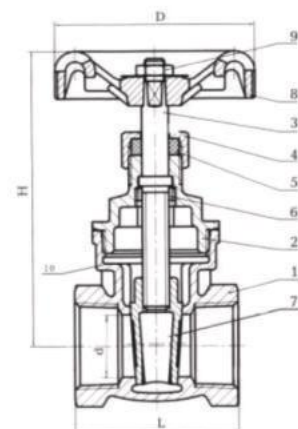

D151N BRONZE NRS GATE VALVE (THREADED)


- ◆ Pressure Rating:PN20
- ◆ Working Medium:Water,Oil,Steam
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7
- ◆ Comply with BSEN12288

Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Bonnet	Bronze CC491K	All
3	Stem	DZR Brass CW602N	All
4	Packing Nut	Brass CW614N	All
5	Packing	P.T.F.E	All
6	Stem Bush	DZR Brass CW602N	All
7	Disc	Bronze CC491K	All
8	Handwheel	Aluminium	All
9	Handwheel Nut	Brass CW614N	All

Dimensions

D151N					
DN	INCH	d	L	H	D
15	$\frac{1}{2}''$	12.7	49.5	74	52
20	$\frac{3}{4}''$	19.1	53.5	85	52
25	1"	25.4	62	106	70
32	$1\frac{1}{4}''$	31.8	70	113	70
40	$1\frac{1}{2}''$	38.2	77	132	92
50	2"	50.9	87	155	92.5

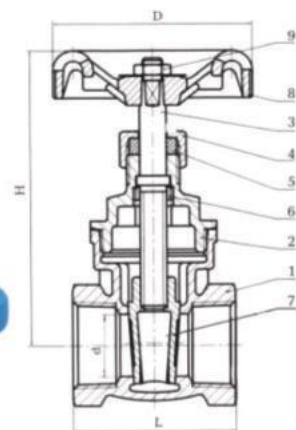

454 BRONZE STRAINER (THREADED)


- ◆ Pressure Rating:PN20
- ◆ Working Medium:Water,Oil,Gas
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7

Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Cap	Bronze CC491K	All
3	Gasket	P.T.F.E	All
4	Screen	Stainless Steel Type304	All

Dimensions

454				
DN	INCH	CM	L	H
15	½"	120	74.5	40
20	¾"	60	86.5	45
25	1"	28	108	64
32	1¼"	28	122	71
40	1½"	28	135	81
50	2"	16	163	96
65	2½"	16	230	110
80	3"	12	260	142
100	4"	12	330	175



654 BRONZE STRAINER (THREADED)


- ◆ Pressure Rating:PN20
- ◆ Working Medium:Water,Oil,Gas
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7

Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Screen	Stainless Steel Type304	All
3	Gasket	P.T.F.E	All
4	Cap	Bronze CC491K	All

Dimensions

654				
DN	INCH	CM	L	H
15	½"	60	58	33
20	¾"	60	70	41
25	1"	60	88	49
32	1¼"	28	96	56
40	1½"	28	107	62
50	2"	28	126	80



STRAINER

691 BRASS STRAINER (THREADED)


- ◆ Pressure Rating:PN16
- ◆ Working Medium:Water,Oil,Gas
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Pipe Thread To ISO228

Bill of Materials

Sequence	Description	Material	Size
1	Body	Brass CW617N	All
2	Cap	Brass CW617N	All
3	Gasket	P.T.F.E	All
4	Screen	Stainless Steel Type304	All

Dimensions

691				
DN	INCH	CM ²	L	H
15	½"	120	74	40
20	¾"	60	86.5	45
25	1"	28	108	64
32	1¼"	28	122	71
40	1½"	28	135	81
50	2"	16	163	96
65	2½"	16	230	110
80	3"	12	260	142
100	4"	12	330	175

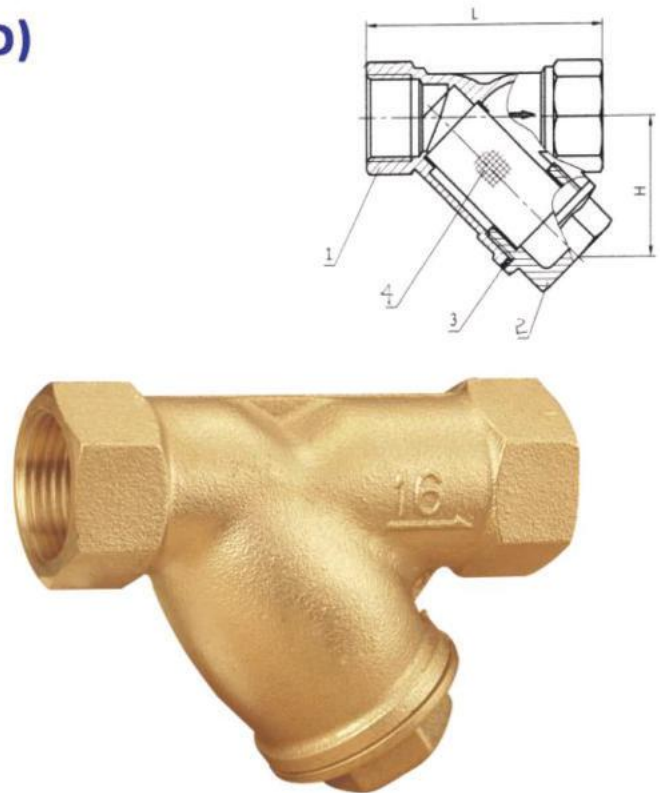

6301 BRASS Y STRAINER


- ◆ Pressure Rating:PN16
- ◆ Working Medium:Water,Oil,Steam
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Pipe Thread to ISO 228

Bill of Materials

Sequence	Description	Material	Size
1	Body	Brass CW614N	All
2	Cap	Brass CW614N	All
3	Gasket	P.T.F.E	All
4	Screen	Stainless Steel Type304	All

Dimensions

6301				
DN	INCH	CM ²	L	H
15	½"	120	54	34
20	¾"	60	64	37.5
25	1"	28	73	42.3
32	1¼"	28	90	51.4
40	1½"	28	93.5	53.2
50	2"	16	114	67.9
65	2½"	16	128	87
80	3"	12	145	102
100	4"	12	175	128

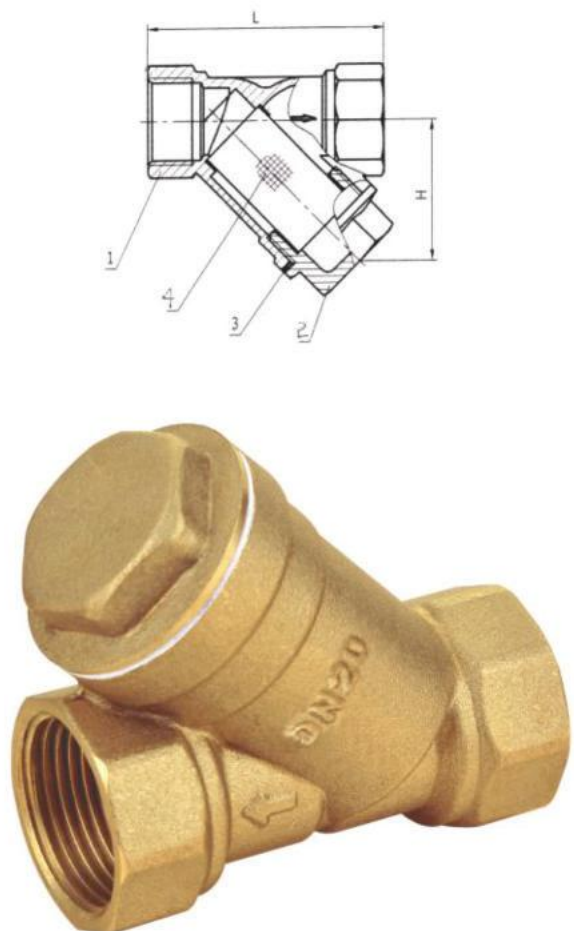

551 BRONZE CHECK VALVE (THREADED)


- ◆ Pressure Rating:PN20
- ◆ Working Medium:Water,Oil,Steam
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7

Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Cap	Bronze CC491K	All
3	Disc	Bronze CC491K	All
4	Hinge	Brass CW617N	All
5	Hinge Pin	Stainless Steel 2Cr13	All
6	Hinge Nut	Brass CW617N	All

Dimensions

551				
DN	INCH	d	L	H
15	1/2"	13	58	37
20	3/4"	19	66	43
25	1"	25	76	49
32	1 1/4"	32	88	57.5
40	1 1/2"	39	96	63
50	2"	50	112	72

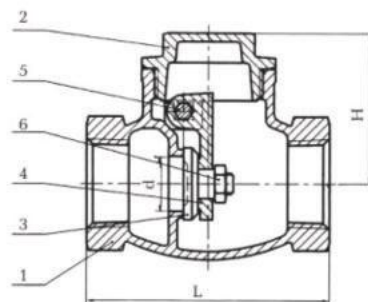

452 BRONZE CHECK VALVE (THREADED)


- ◆ Pressure Rating:PN25
- ◆ Working Medium:Water,Oil,Steam
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7

Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Cap	Bronze CC491K	All
3	Disc	Bronze CC491K	1. 1/4-3
3	Disc	Brass CW617N	3/8-1
4	Hinge	Bronze CC491K	All
5	Hinge Pin	Stainless Steel ASTM A182 Gr.F316	2. 1/2 & 3
5	Hinge Pin	Stainless Steel	3/8-2
6	Hinge Nut	Brass CW617N	All

Dimensions

452			
DN	INCH	L	H
10	3/8"	48	33
15	1/2"	58	38
20	3/4"	66	42
25	1"	80	49
32	1 1/4"	89	56
40	1 1/2"	95	65
50	2"	108	76

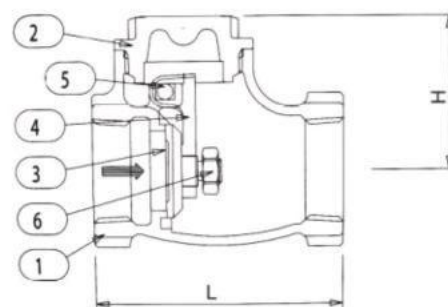


CHECK VALVE

401A BRASS CHECK VALVE (THREADED)

- ◆ Pressure Rating:PN16
- ◆ Working Medium:Water,Oil,Gas
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Test Pressure :According to GB/T13927

Bill of Materials

Sequence	Description	Material	Size
1	Cap	Brass CW617N	All
2	Packing	PTFE	All
3	Hinge Pin	Brass CW617N	All
4	Hinge	H62	All
5	Disc	Brass CW617N	All
6	Hinge Nut	H62	All
7	Body	Brass CW617N	All

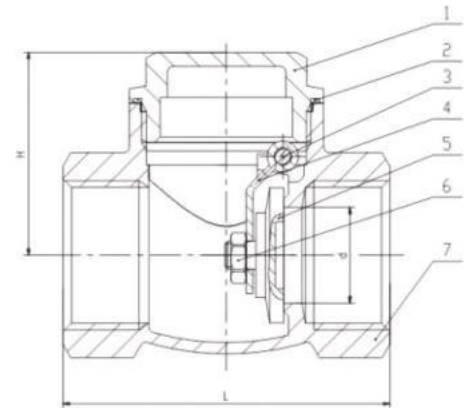

Dimensions


401A				
DN	INCH	d	L	H
15	1/2"	13	49	31.5
20	3/4"	17	58	36
25	1"	23	69	43.5
32	1 1/4"	28	76	45.5
40	1 1/2"	33	83	52
50	2"	44	92	57.5

4301 BRASS SWING CHECK VALVE (THREADED)

- ◆ Pressure Rating:PN16
- ◆ Working Medium:Water,Oil,Steam
- ◆ Working Temperature: $t \leq 170^{\circ}\text{C}$
- ◆ Pipe Thread To ISO228

Bill of Materials

Sequence	Description	Material	Size
1	Body	Brass CW617N	All
2	Cap	Brass CW614N	All
3	Disc	Brass CW614N	All
4	Hinge	Brass CW614N	All
5	Hinge Pin	Stainless Steel 2Cr13	All

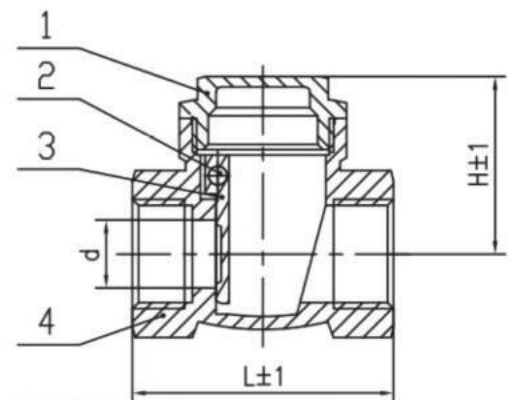

Dimensions

4301				
DN	INCH	L	H	d
15	1/2"	46.5	33	12
20	3/4"	52	35	17
25	1"	62	41.5	22
32	1 1/4"	69.5	49.5	28
40	1 1/2"	72	51.5	32
50	2"	83	58.5	41
65	2 1/2"	106	75	49
80	3"	136	84	68
100	4"	166	100.5	91

651 FIXED ORIFICE DOUBLE REGULATING VALVE (FODRV)

- ◆ Pressure Rating: PN25
- ◆ Working Medium: Water
- ◆ Working Temperature: $t \leq 120^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7
- ◆ Comply with BS7350

Specification

The Fixed Orifice Double Regulating Valve offers an accuracy of $\pm 5\%$ on all settings, for precise flow regulation. They are Y-pattern globe valves with characterised throttling disc tending towards equal percent- age performance. Fixed Orifice Double regulating feature allows valve opening to be set with an Allen key. Operation of the valve is by means of the Microset hand wheel.

Application

In multiple unit systems, the 951 has sufficient authority to give effective regulation over the range of flows covered by matching flow measurement devicesalves.




Bill of Materials

Sequence	Description	Material	Size
1	Body	Bronze CC491K	All
2	Disc Face	P.T.F.E	1" - 2"
2	Disc Face	DZR Brass CW602N	1/2" - 3/4"
3	Orifice Plate	DZR Brass CW602N	All
4	Nut	DZR Brass CW602N	All
5	Disc	DZR Brass CW602N	All
6	Disc Retaining Ring	DZR Brass CW602N	All
7	O Ring	N.B.R	All
8	Bonnet	DZR BRASS CW602N	1/2" - 1 1/4"
8	Bonnet	Bronze CC491K	1 1/2" - 2"
9	Stem	DZR BRASS CW602N	All
10	Retainer Ring	Stainless Steel 304	All
11	Sleeve	Brass CW617N	All
12	Screw	Brass CW614N	All
13	Handwheel	PA	All
14	Cap	PA	All
15	Screw	Stainless Steel 304	All
16	Test Points	DZR BRASS CW602N	All

Dimensions & Coefficients

651					
DN	INCH	A	B	Flow (kv)	Kvs
15	1/2"	87	105	1.72	2.2
20	3/4"	96	106	2.97	4.6
25	1"	100	127	4.75	8.5
32	1 1/4"	114	128	10.25	16.7
40	1 1/2"	125	143	16.83	26.1
50	2"	146	144	27.26	43.2

FIXED ORIFICE DOUBLE REGULATING VALVE

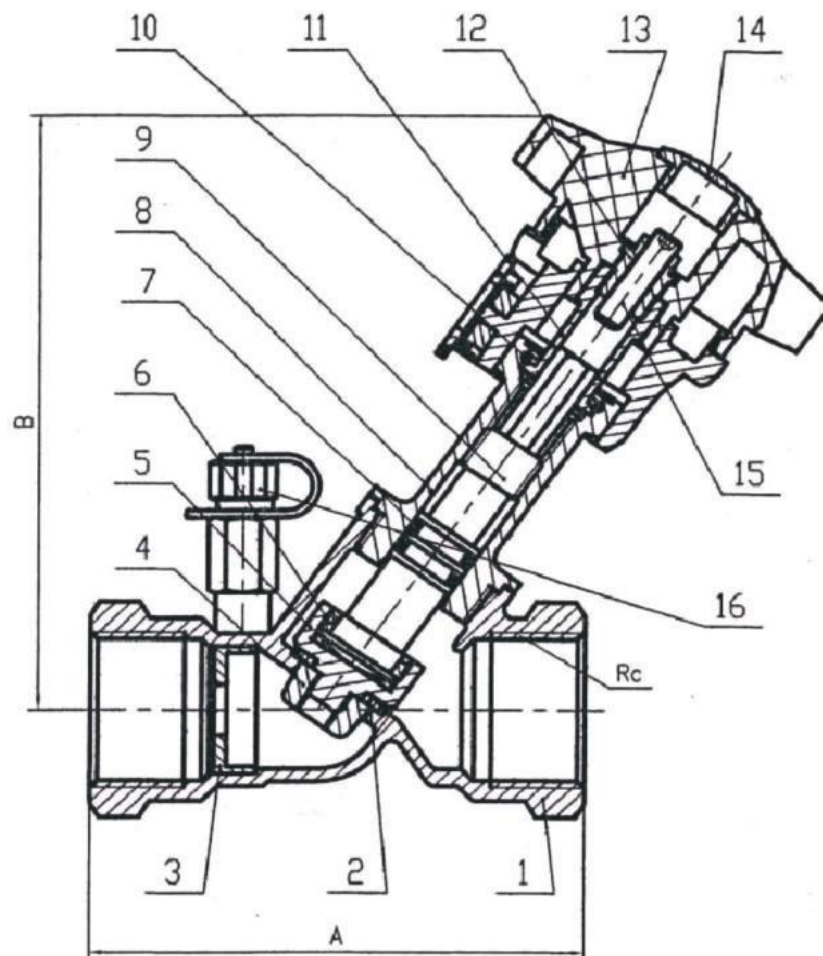

701 BRASS AUTO AIR VENT (THREADED)


- ◆ Pressure Rating:PN10
- ◆ Working Medium:Water
- ◆ Working Temperature: $t \leq 70^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7

Bill of Materials

Sequence	Description	Material	Size
1	Cap	Brass CW614N	All
2	Stem	Brass CW614N	All
3	Gasket	NBR	All
4	Spring	Stainless steel	All
5	O Ring	NBR	All
6	Air cap	Brass CW614N	All
7	Gasket	NBR	All
8	Core	Brass CW614N	All
9	O Ring	NBR	All
10	Body	Brass CW614N	All
11	Floater	Polytene	All
12	Floater Bar	Brass CW614N	All
13	O Ring	NBR	All
14	Connector	Brass CW614N	All
15	Spring	Stainless steel	All
16	O Ring	NBR	All
17	Disc	Brass CW614N	All

Dimensions

701			
DN	INCH	H	L
15	1/2"	68	50
20	3/4"	68	50
25	1"	68	50

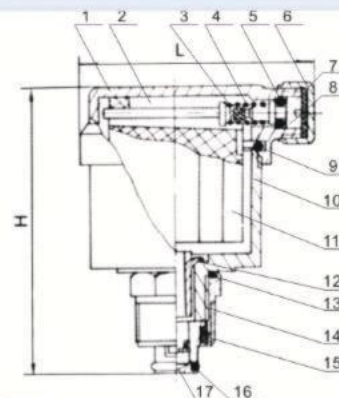

306 BRASS DRAINING TAP (THREADED)


- ◆ Pressure Rating:PN16
- ◆ Working Medium: Water
- ◆ Working Temperature: $\leq 120^{\circ}\text{C}$
- ◆ Taper Pipe Thread To ISO7

Bill of Materials

Sequence	Description	Material	Size
1	Stem	DZR Brass CW602N	All
2	Bonnet	DZR Brass CW602N	All
3	O Ring	NBR	All
4	O Ring	NBR	All
5	Disc	DZR Brass CW602N	All
6	Gasket	NBR	All
7	Nut	Brass	All
8	Body	DZR Brass CW602N	All

Dimensions

306		
DN	INCH	L
15	1/2"	56
20	3/4"	64
25	1"	89

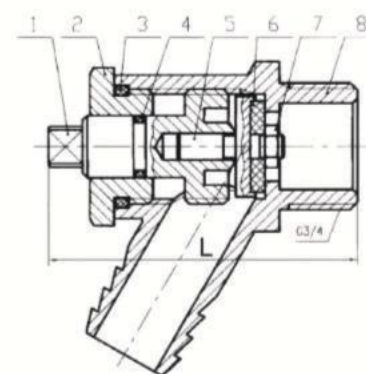


FLOAT VALVE

931A BRASS FLOAT VALVE

- ◆ Pressure Rating:PN10
- ◆ Working Medium: Water
- ◆ Working Temperature: $\leq 90^{\circ}\text{C}$

Bill of Materials

Sequence	Description	Material	Size
1	Ball	Brass CW614N	All
2	Nut	Brass CW614N	All
3	Gasket	EPDM	All
4	Gasket	EPDM	All
5	The Valvo Core	Brass CW614N	All
6	Hinge Pin	Brass CW614N	All
7	Hinge	Brass CW614N	All
8	Nut	Brass CW614N	All
9	Ball	PP	All

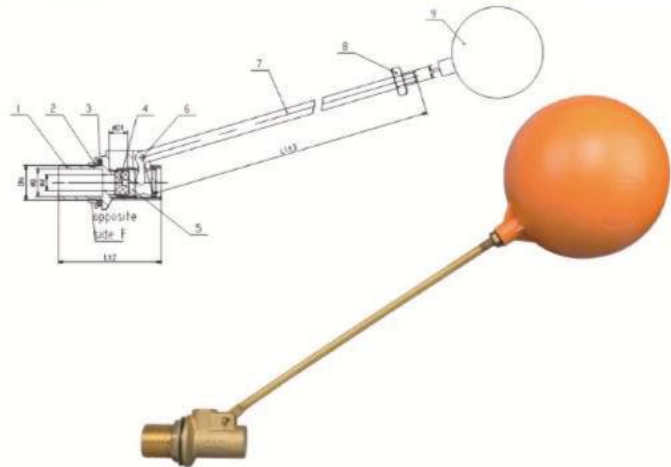

Dimensions


931A											
DN	INCH	L	L1	d	D	D1	F	G	Weight (g)	Ball (IN)	
15	½"	78	260	9	15.5	14	24.3	M8	275±5	4.5"	
20	¾"	78	260	9	20	14	30	M8	304±5	5"	
25	1"	90	360	10	26	18	37.2	M10	574±5	6"	
32	1¼"	148	375	22	36.5	33	44	M12	1183±5	8"	
40	1½"	165	458	22	40	33	50	M12	1350±5	10"	
50	2"	170	495	22	51.5	33	62.5	M12	1674±5	10"	
65	2½"	195	625	41	68.5	63	81.7	M14	3325±5	12"	
80	3"	195	625	42	81.5	63	93	M14	3250±5	12"	
100	4"	195	625	42	105.5	64	120	M14	3960±5	12"	

931B BRASS FLOAT VALVE

- ◆ Pressure Rating:PN10
- ◆ Working Medium: Water
- ◆ Working Temperature: $\leq 90^{\circ}\text{C}$

Bill of Materials

Sequence	Description	Material	Size
1	Ball	TP2/SS304	All
2	Nut	Brass CW614N	All
3	Hinge	Brass CW614N	All
4	Adjusting Lever	Brass CW614N	All
5	Pin	SS304	All
6	Pin	SS304/Brass CW614N	All
7	Piston Core	Brass CW614N	All
8	Body	Brass CW614N	All
9	Gasket	A2-70	All
10	Disc	Silica gel	All
11	Crew	A2-70	All
12	Valve Seat	Brass CW614N	All
13	Gasket	EPDM	All
14	Nut	Brass CW614N	All

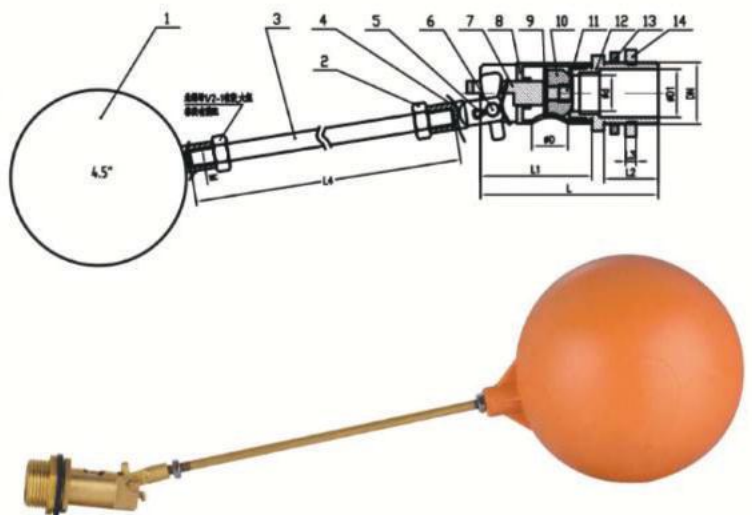

Dimensions

131B												
DN	INCH	L	L1	L2	L3	d	D	D1	L4	M	Weight (g)	Ball (IN)
15	½"	59	37	18	3.5	12	12	16	230	M8		4.5"
20	¾"	59	37	19	3.5	12	12	21	230	M8		5"
25	1"	71.5	46	21.5	3.5	14	22	27	230	M8		6"
32	1¼"	74	49	24	4	14	21	33.5	600	M12		8"
40	1½"	82	55.5	22	3.5	22	32	41	600	M12		10"
50	2"	85	55.5	24.5	4	22	32	51	600	M12	1582	10"
65	2½"	116.5	81	31	7	30	53	66.5	796	M14		12"
80	3"	119	81	32	7	30	53	78	796	M14		12"
100	4"	142	98	36	6.5	40.5	67	102.5	796	M14	3950	12"

9200 DOUBLE FLOW MEASUREMENT DEVICE

- ◆ Pressure Rating:PN16
- ◆ Working Medium:Water
- ◆ Working Temperature: $t \leq 120^{\circ}\text{C}$

Specification

9200 is a stainless steel orifice plate having a square edged entrance. The two stainless steel extension tubes are fitted with pressure test valves. Accuracy of flow measurement at normal velocities is $\pm 3\%$.



Bill of Materials

Description	Material
Orifice and carrier	Stainless steel
Extension tubes	Stainless steel
Pressure test valves	DZR Brass CW602N



Pressure Test Points

Pressure Rating: PN25

Max. Temp: 120°C



Pressure Test Points Bill of Materials

Description	Material	Size
Cap	DZR Brass CW602N	$\frac{1}{4}'' \frac{1}{2}''$
Cap Washer	EPDM	$\frac{1}{4}'' \frac{1}{2}''$
Body	DZR Brass CW602N	$\frac{1}{4}'' \frac{1}{2}''$
Tie	Polypropylene	$\frac{1}{4}'' \frac{1}{2}''$
Seal	EPDM	$\frac{1}{4}'' \frac{1}{2}''$
Retaining Ring	DZR Brass CW602N	$\frac{1}{4}'' \frac{1}{2}''$

Dimensions

9200								
DN	INCH	Face-to-face A mm	Centre-to-top B mm	Outside diameter C mm		Flow Kv	Headloss K	Kvs
				PN16	PN25			
65	2½"	18	112	127	127	151	1.6	104
80	3"	18	118	142	142	203	1.4	116
100	4"	18	125	162	168	351	1.4	213
125	5"	18	135	192	194	550	1.3	333
150	6"	18	145	218	224	765	1.7	476
200	8"	18	165	273	284	1354	1.8	768
250	10"	18	185	329	340	2103	1.8	1153
300	12"	18	205	384	400	3009	1.4	1743
350	14"	21	222	444	457	2734	2.5	1875
400	16"	21	240	495	514	3507	2.5	2582
450	18"	21	261	555	564	4543	2.5	3270
500	20"	21	283	617	624	5603	2.5	4079
600	24"	25	325	734	731	8111	2.5	4938

FIXED ORIFICE DOUBLE REGULATING VALVE

J721 FIXED ORIFICE DOUBLE REGULATING VALVE (FODRV)

- ◆ Pressure Rating: PN16
- ◆ Working Medium: Water
- ◆ Working Temperature: -10~120°C
- ◆ Flange to BSEN1092-2
- ◆ Comply with BS7350

Specification

Y-Pattern globe valve with a characterised throttling disc and ends flanged to BS EN 1092-2 PN16.

The valve opening may be set to control flow at a pre-determined rate. Operation of the valve is by means of a handwheel incorporating a micrometer device.

The Double Regulating feature allows the valve to be used for isolation and to be reopened to its pre-set position to maintain required flow rate.




Application

In two unit systems, the 9201 has sufficient authority to regulate flow in circuits incorporating a flow measurement device.

Bill of Materials

Description	Material	Spec	Size
Body	Ductile Iron	EN-JL 1050	All
Bonnet	Ductile Iron	EN-JL 1050	All
Stem	Stainless Steel	BS970 410S21	All
Disc	EPDM Coated DI	EN-JL 1050	All
Gland	Brass	EN 12165 CW617N	65-150mm
Gland	Ductile Iron	EN-JL 1050	200-300mm
Stem Nut	Brass	EN 12165 CW617N	All
Handwheel	Ductile Iron	EN-JL 1050	All
Test Points	Brass	EN12165 CW602N	All
Orifice Plate	Brass	EN 12165 CW617N	All
Packing	Graphite	Non-Asbestos	All

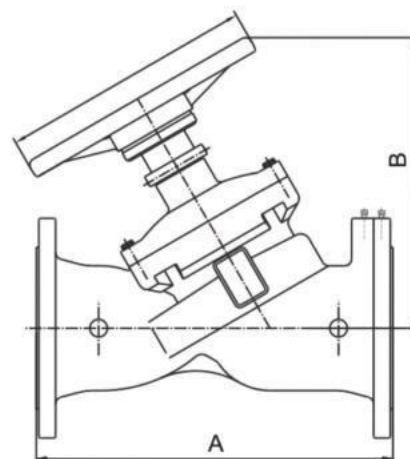

Dimensions & Coefficients

J721						
DN	INCH	A	B	Flow (kv)	Kvs	Head Loss(K)
65	2½"	290	265	104	104	5.32
80	3"	310	270	112	116	6.48
100	4"	350	310	162	213	13.15
125	5"	400	340	254	333	8.32
150	6"	480	340	335	476	7.33
200	8"	600	537	535	768	8.26
250	10"	730	570	1099	1153	7.27
300	12"	850	690	1588	1743	8.36
350	14"	980	685	1635	1798	12.50
400	16"	1000	965	2125	2338	13.60
450	18"	1200	1020	2698	2698	14.40
500	20"	1250	1065	3371	3708	14.80
600	24"	1450	1180	4091	4500	15.30

• CONCENTRIC BUTTERFLY VALVE




- Water works and water resource project
- Environment protection
- Public facilities
- Power and public utilities
- Building industry
- Petroleum, chemical
- Steel, metallurgy
- Paper making industry
- Foods, Beverage



Butterfly valve as used as shutting-off or throttling unit for petroleum processing, chemicals, food, medicine, textile, paper making, hydroelectricity engineering as well as light industry, etc. it can be installed in any selected position.

CONCENTRIC BUTTERFLY VALVE


Through precise manufacturing, the main parts of this butterfly valve ensure valve's operation in long stable and reliable condition

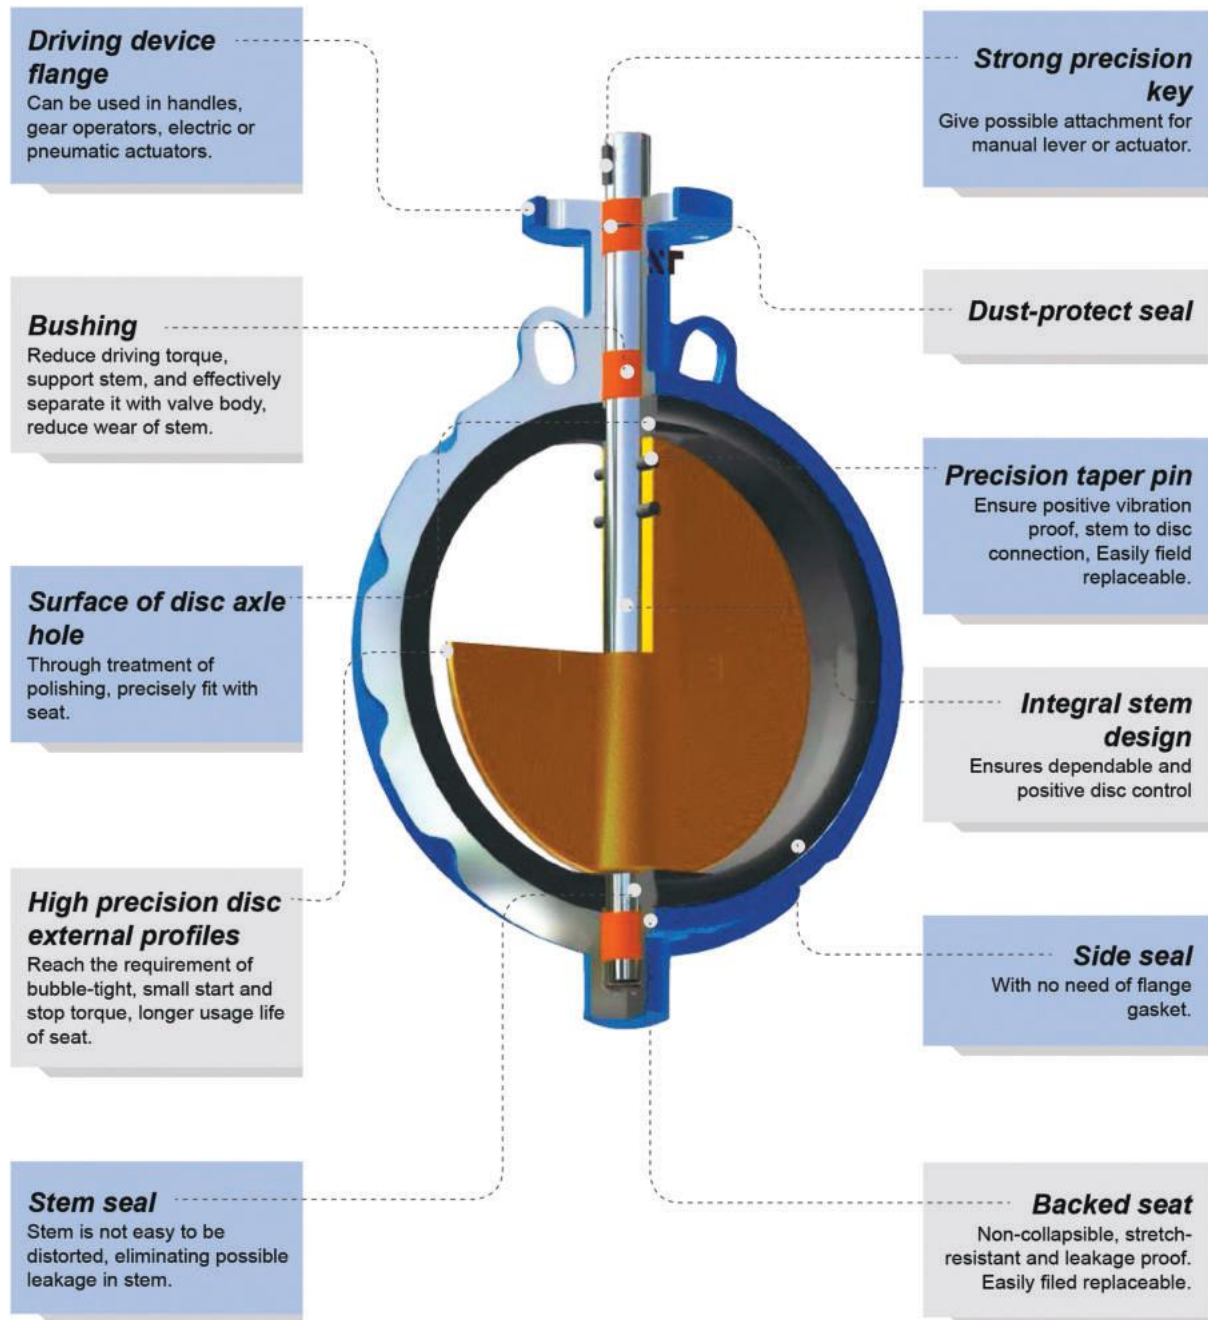




- Type:
Wafer
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage



J201 WAFFER BUTTERFLY VALVE (TWO HOLES)

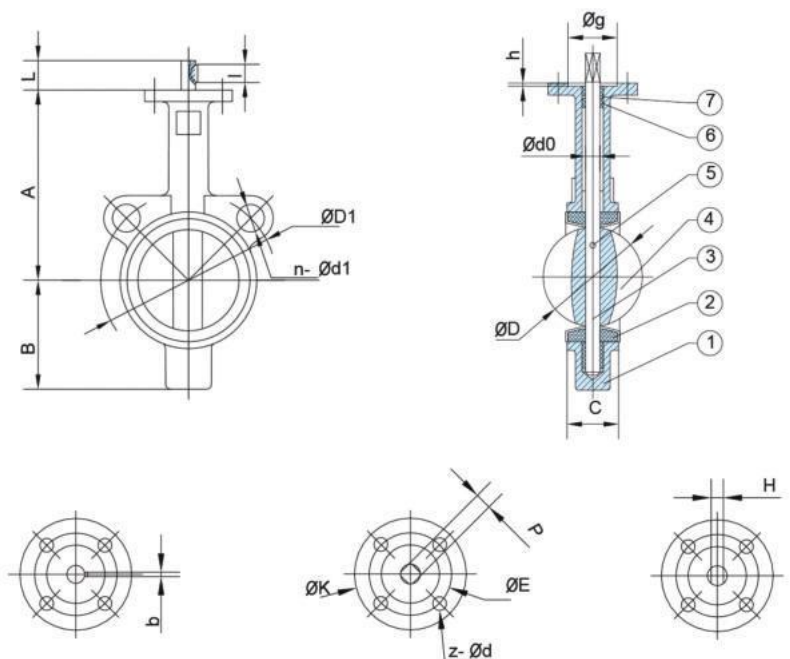

ROUND WITH KEY

DIAGONAL SQUARE HEAD

DOUBLE D HEAD

STANDARD MATERIALS OF MAIN PARTS


NO.	PART	MATERIAL
1	Body	Cast Iron ,Ductile Iron ,Carbon Steel ,Stainless Steel
2	Seat	NBR,EPDM,Viton,Neoprene ,Hypalon,Silicon
3	Shaft	Stainless Steel416,316,304
4	Disc	Ductile Iron +Ni,CF8,CF8M,Bronze
5	Pin	Stainless Steel
6	Bushing	PTFE,Bronze
7	O Ring	NBR,EPDM

DIMENSIONS

SIZE		A	B	C	D	L	d0	P	H	key	UPPER FLANGE					ANSI 150		DIN PN10/16	
in	DN									bxl	K	E	z-d	g	h	D1	n-ød1	D1	n-ød1
2	50	140	80	42	52.6	32	126	9	10	3X16	77	50	4.7	35	3	120.5	4-19	125	4-18
2-1/2	65	152	89	44.7	64.5	32	126	9	10	3X16	77	50	4.7	35	3	139.5	4-19	145	4-18
3	80	159	95	45.2	78.8	32	126	9	10	3X16	77	50	4.7	35	3	152.5	4-19	160	4-18
4	100	178	114	52.1	104	32	157.7	11	12	5X19	90	70	4.9	55	3	190.5	8-19	180	8-18
5	125	190	127	54.4	123.3	32	189.2	14	14	5X19	90	70	4.9	55	3	216	8-22	210	8-18
6	150	203	139	55.8	155.6	32	189.2	14	14	5X19	90	70	4.9	55	3	241.5	8-22	240	8-23
8	200	238	175	60.6	202.5	45	221	17	17	5X19	125	102	4-12	70	3.5	298.5	8-22	296	8-12-23
10	250	268	203	65.6	250.5	45	284.5	22	22	8X28	125	102	4-12	70	3.5	362	12-25	350/355	12-23/27
12	300	306	242	76.9	301.6	45	316	22	24	8X28	125	102	4-12	70	3.5	432	12-25	400/410	12-23/27

WAFFER BUTTERFLY VALVE

J222 WAFFER BUTTERFLY VALVE

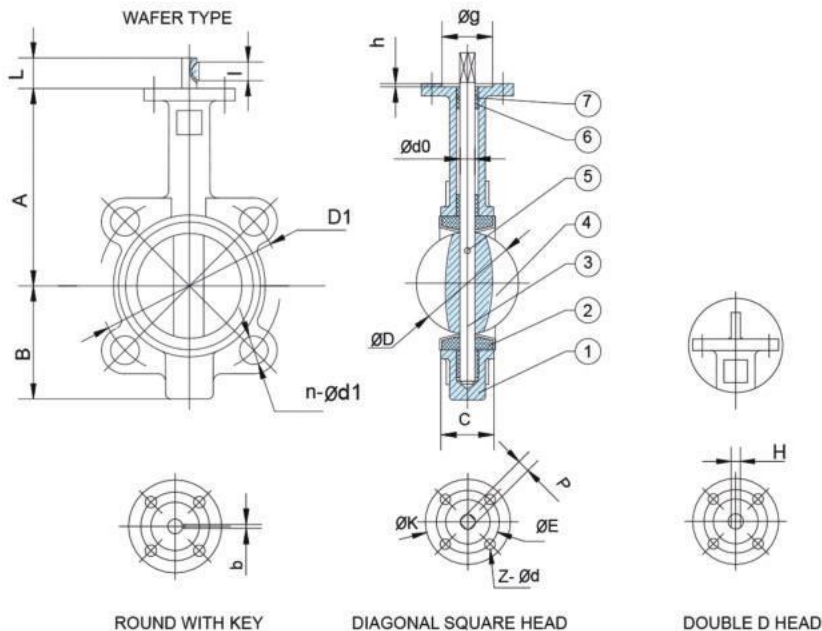

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron ,Ductile Iron ,Carbon Steel ,Stainless Steel
2	Seat	NBR,EPDM,Viton,Neoprene ,Hypalon,Silicon
3	Shaft	Stainless Steel416,316,304
4	Disc	Ductile Iron +Ni,CF8,CF8M,Bronze
5	Pin	Stainless Steel
6	Bushing	PTFE,Bronze
7	O Ring	NBR,EPDM

DIMENSIONS

SIZE in DN	A	B	C	D	L	d0	P	H	key					UPPER FLANGE					ANSI 150		DIN PN10/16	
									bxl	K	E	z-d	g	h	D1	n-ød1	D1	n-ød1				
1-1/2 40	145	75	33	42.4	32	12.6	-	-	3X16	77	50	4.7	35	3	98.5	4-16	110	4-18				
2 50	161	80	42	52.6	32	12.6	9	10	3X16	77	50	4.7	35	3	120.5	4-19	125	4-18				
2-1/2 65	175	89	44.7	64.5	32	12.6	9	10	3X16	77	50	4.7	35	3	139.5	4-19	145	4-18				
3 80	181	95	45.2	78.8	32	12.6	9	10	3X16	77	50	4.7	35	3	152.5	4-19	160	4-18				
4 100	200	114	52.1	104	32	15.77	11	12	5X19	90	70	4.9	55	3	190.5	8-19	180	8-18				
5 125	213	127	54.4	123.3	32	18.92	14	14	5X19	90	70	4.9	55	3	216	8-22	210	8-18				
6 150	226	139	55.8	155.6	32	18.92	14	14	5X19	90	70	4.9	55	3	241.5	8-22	240	8-23				
8 200	260	175	60.6	202.5	45	22.1	17	17	5X19	125	102	4-12	70	35	298.5	8-22	295	8-12-23				
10 250	292	203	65.6	250.5	45	28.45	22	22	8X28	125	102	4-12	70	35	362	12-25	350/355	12-23/27				
12 300	337	242	76.9	301.6	45	31.6	22	24	8X28	140	102	4-12	70	35	432	12-25	400/410	12-23/27				
14 350	368	267	76.5	333.3	45	31.6	22	24	8X28	140	102	4-12	70	35	476	12-29	460/470	16-23/27				
16 400	400	309	86.5	389.6	51.2/72	33.15/38	24	24	10X50	175	140	4-18	100	4	540	16-29	515/525	16-27/30				
18 450	422	328	105.6	440.5	51.2/72	38/42.86	27	27	10X50	175	140	4-18	100	4	578	16-32	565/585	20-27/30				
20 500	480	361	131.8	491.6	64.2/82	41.15/45.72	32	32	10X50	175	140	4-18	100	4	635	20-32	620/650	20-27/33				
24 600	562	459	152	592.5	70.2/82	50.65/53.98	36	36	2-16X60	210	165	4-23	130	5	749.5	20-35	725/770	20-30/36				
28 700	624	520	163	695	66/82	55/63.35	-	-	2-18X63	300	254	8-18	200	55	863.5	28-35	840	24-30/36				
30 750	660	539	165	744.3	66/82	55/63.35	-	-	2-18X63	300	254	8-18	200	55	914.5	28-35	-	-				
32 800	672	591	188	794.7	66/82	55/63.35	-	-	2-18X63	300	254	8-18	200	55	978	28-41	950	24-33/39				
36 900	720	656	203	864.7	118	75	-	-	2-20X100	300	254	8-18	200	55	1086	32-41	1050	28-33/39				
40 1000	800	721	216	965	142	85	-	-	2-20X100	300	254	8-18	200	55	1200	36-41	1160/1170	28-36/42				


- Type:
Wafer
- Face to Face:
API609,BS5155,DIN3202, ISO5752
- Flange:
DIN,BS,UNI,ISO,ANSI, AS,JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage






- Type:
Wafer
 - Face to Face:
API609,BS5155,DIN3202, ISO5752
 - Flange:
AS2129 Table E/D
 - Mounting Flange:
ISO5211
-
- Working Pressure:
PN16(200PSI)
 - Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage



J202 WAFFER BUTTERFLY VALVE

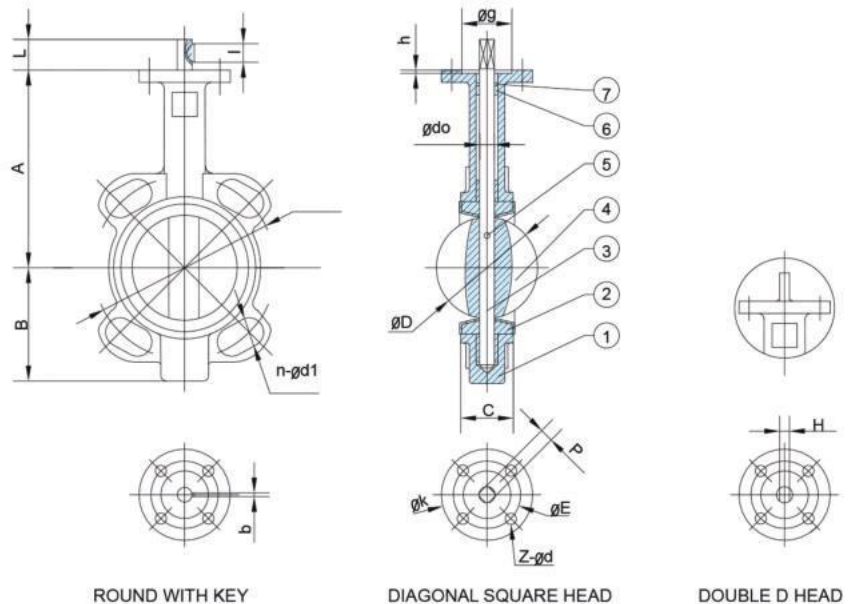

STANDARD MATERIALS OF MAIN PARTS


NO.	PART	MATERIAL
1	Body	Cast Iron ,Ductile Iron ,Carbon Steel ,Stainless Steel
2	Seat	NBR,EPDM,Viton,Neoprene ,Hypalon,Silicon
3	Shaft	Stainless Steel416,316,304
4	Disc	Ductile Iron +Ni,CF8,CF8M,Bronze
5	Pin	Stainless Steel
6	Bushing	PTFE,Bronze

DIMENSIONS

SIZE	in	DN	A	B	C	D	L	d0	P	H	key b x l	UPPER FLANGE					ANSI 150		AS2129-D		AS2129-E	
												K	E	z- ød	g	h	D1	n- ød1	D1	n- ød1	D1	n- ød1
2	50		130.5	66.5	42	52.6	32	12.6	9	10	3x16	77	50	4-7	35	3	120.5	4-19	114	4-18	114	4-18
2-1/2	65		140	71	44.7	64.5	32	12.6	9	10	3x16	77	50	4-7	35	3	139.5	4-19	127	4-18	127	4-18
3	80		150	83	45.2	78.8	32	12.6	9	10	3x16	77	50	4-7	35	3	152.5	4-19	146	4-18	146	4-18
4	100		163	95	52.1	104	32	15.77	11	12	5x19	90	70	4-9	55	3	190.5	8-19	178	4-18	178	8-18
5	125		178	110	54.4	123.3	32	18.92	14	14	5x19	90	70	4-9	55	3	216	8-22	210	8-18	210	8-18
6	150		191	124	55.8	155.6	32	18.92	14	14	5x19	90	70	4-9	55	3	241.5	8-22	235	8-18	235	8-22
8	200		239	163	60.6	202.5	45	22.1	17	17	5x19	125	102	4-12	70	3.5	298.5	8-22	292	8-18	292	8-22
10	250		285	227	65.6	250.5	45	28.45	22	22	8x28	125	102	4-12	70	3.5	362	12-25	356	8-22	356	12-22
12	300		315	252	76.9	301.6	45	31.6	22	24	8x28	125	102	4-12	70	3.5	432	12-25	406	12-22	406	12-26

WAFFER BUTTERFLY VALVE

U-TYPE BUTTERFLY VALVE

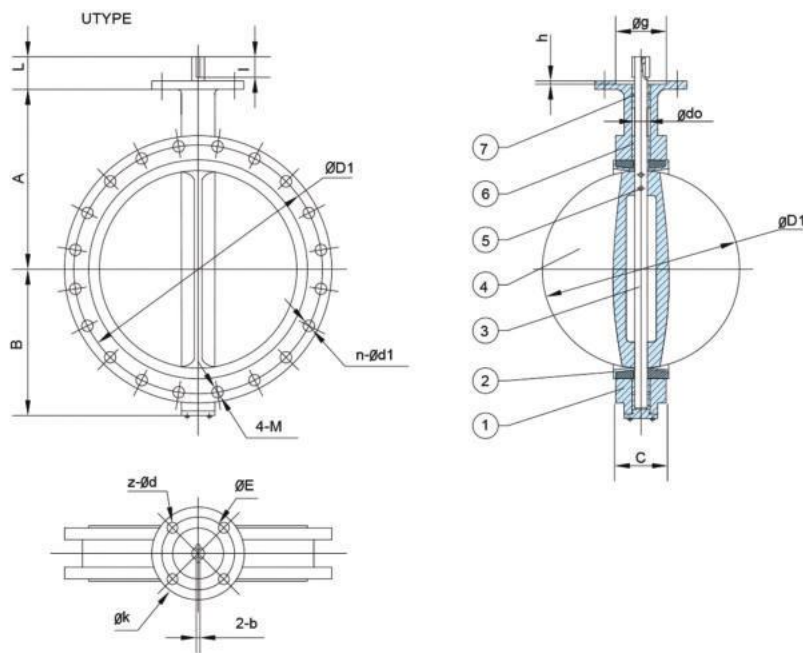

- Type:
U-type
- Face to Face:
BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron ,Ductile Iron ,Carbon Steel ,Stainless Steel
2	Seat	NBR, EPDM, Viton, Neoprene , Hypalon, Silicon
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron +Ni, CF8, CF8M, Bronze
5	Pin	Stainless Steel
6	Bushing	PTFE, Bronze

DIMENSIONS

SIZE in DN	A	B	C	D	L	DO	KEY 2-bXl	UPPER FLANGE					ANSI150			DIN PN10/PN16		
								K	E	z-Ød	g	h	D1	n-Ød1	4-M	D1	n-Ød1	4-M
16 400	400	309	86.5	389.6	51.2/72	33.15/38	1-10X50	175	140	4-18	100	4	540	16.29	-	515/525	16-27/30	-
18 450	422	328	105.6	440.5	51.2/72	38.42/86	1-10X50	175	140	4-18	100	4	578	16.32	-	565/585	20-27/30	-
20 500	480	361	131.8	491.6	53/78	41.15/45.72	1-10X50	175	140	4-18	100	4	635	20.32	-	620/650	20-27/33	-
24 600	562	459	152	582.5	70.2/82	50.65/53.98	2-16X60	210	165	4-23	130	5	749.5	20.35	-	725/770	20-30/36	-
28 700	624	520	163	665	66/82	55.63/35	2-18X63	300	254	8-18	200	5.5	863.5	24.35	4-11/4"	840	20-30/36	4-M27/M33
30 750	660	539	165	744.3	66/82	55.63/35	2-18X63	300	254	8-18	200	5.5	914.5	24.35	4-11/4"	-	-	-
32 800	672	591	188	794.7	66/82	55.63/35	2-18X63	300	254	8-18	200	5.5	978	24.41	4-11/2"	950	20-33/39	4-M30/M36
36 900	720	666	203	864.7	118	75	2-20X100	300	254	8-18	200	5.5	1086	28.41	4-11/2"	1050	24-33/39	4-M30/M36
40 1000	800	721	216	965	142	85	2-22X140	300	254	8-18	200	5.5	1200	32.41	4-11/2"	1160/1170	24-36/42	4-M33/M39
42 1050	868	757	251	1030.5	150	95	2-25X140	300	254	8-18	200	5.5	1257.5	32.41	4-11/2"	-	-	-
48 1200	941	844	276	1161.2	150	105	2-28X140	350	298	8-23	230	5.5	1422.5	40.41	4-11/2"	1380/1390	28-39/48	4-M36/M45



• CONCENTRIC BUTTERFLY VALVE



- Water works and water resource project
- Environment protection
- Public facilities
- Power and public utilities
- Building industry
- Petroleum, chemical
- Steel, metallurgy
- Paper making industry
- Foods, Beverage



Butterfly valve as used as shutting-off or throttling unit for petroleum processing, chemicals, food, medicine, textile, paper making, hydroelectricity engineering as well as light industry, etc. it can be installed in any selected position.

CONCENTRIC BUTTERFLY VALVE

Type: Wafer, Lugged
 Face to Face: AP1609, BS5155, DIN3202, ISO 5752
 Flange: DIN, BS, UNI, ISO, ANSI, AS, JIS
 Mounting Flange: ISO5211

Working Pressure: PN16(200PSI)
 Application: Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

Weather Seal

Top bushing keeps dust and moisture from entering the upper shaft journal.

Shaft

Two stub shaft design allows the disc to float within the flow-way increasing cycle life.

Bushing(6)

Shaft bushing reduce torque and isolate the shaft from the valve body preventing seizure of the shaft due to corrosion in the shaft journal.

Seat Face

Seat to flange seal eliminates the need for flange gaskets.

Seat

Phenolic-backed seat is non-collapseable, stretch resistant, blow out proof, and field replaceable

Mounting Flange

ISO 5211 mounting flange accommodates direct mounting of all types of actuators, including: handles, gear operators, electric and pneumatic.

O-Ring(2)


Shaft seal provides further assurance against stem leakage.

Hub Seal

Smooth finished disc flats mate with seat flats to give a highly efficient prevents leakage into the shaft area.

Disc

Precision profile provides bubble-tight shut-off, assures minimum torque and longer seat life. Maximum flow is achieved.

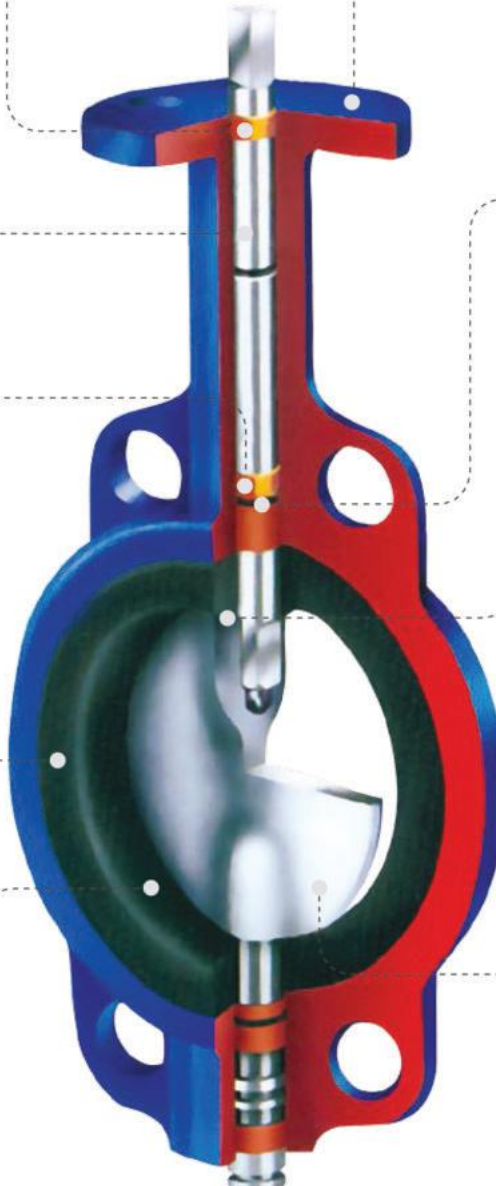






- Type:
Wafer
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211


-
- Working Pressure:
PN16(200PSI)
 - Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage



J206 WAFFER BUTTERFLY VALVE (HALF SHAFT WITHOUT PIN)

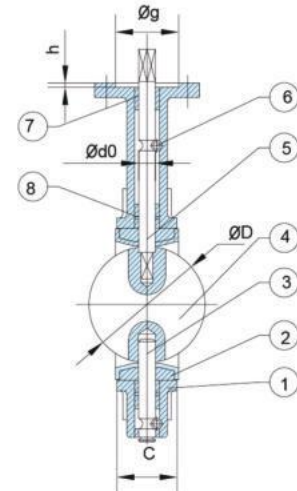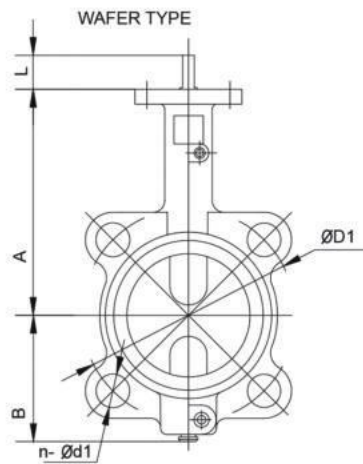

DOUBLE D HEAD



DIAGONAL SQUARE HEAD

STANDARD MATERIALS OF MAIN PARTS


NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Carbon Steel, Stainless Steel
2	Seat	NBR, EPDM, PTFE, Viton, Neoprene, Hypalon, Silicon
3	lower Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni(Nylon/Epoxy), CF8, CF8+PTFE(PFA), CF8M, CF8M+PTFE(PFA), Bronze
5	Upper Shaft	Stainless Steel 416, 316, 304
6	Locating Pin	Carbon Steel
7	Bushing	PTFE
8	O Ring	NBR, EPDM

DIMENSIONS

SIZE		A	B	C	D	L	d0	P	H	UPPER FLANGE					ANSI 150		DIN PN10/16	
IN	DN									K	E	z-d	g	h	D1	n-d1	D1	n-d1
2	50	161	80	42	52.6	32	12.6	9	10	77	50	4-7	35	3	120.5	4-19	125	4-18
2-1/2	65	175	89	44.7	64.5	32	12.6	9	10	77	50	4-7	35	3	139.5	4-19	145	4-18
3	80	181	95	45.2	78.8	32	12.6	9	10	77	50	4-7	35	3	152.5	4-19	160	4/8-18
4	100	200	114	52.1	104	32	15.77	11	12	90	70	4-9	55	3	190.5	8-19	180	8-18
5	125	213	127	54.4	123.3	32	18.92	14	14	90	70	4-9	55	3	216	8-22	210	8-18
6	150	226	139	55.8	155.6	32	18.92	14	14	90	70	4-9	55	3	241.5	8-22	240	8-23
8	200	260	175	60.6	202.5	45	22.1	17	17	125	102	4-12	70	3.5	298.5	8-22	295	8/12-23
10	250	292	203	65.6	250.5	45	28.45	22	22	125	102	4-12	70	3.5	362	12-25	350/355	12-23/27
12	300	337	242	76.9	301.6	45	31.6	22	24	125	102	4-12	70	3.5	432	12-25	400/410	12-23/27

WAFFER BUTTERFLY VALVE

J208 WAFFER BUTTERFLY VALVE (THROUGH SHAFT WITHOUT PIN)

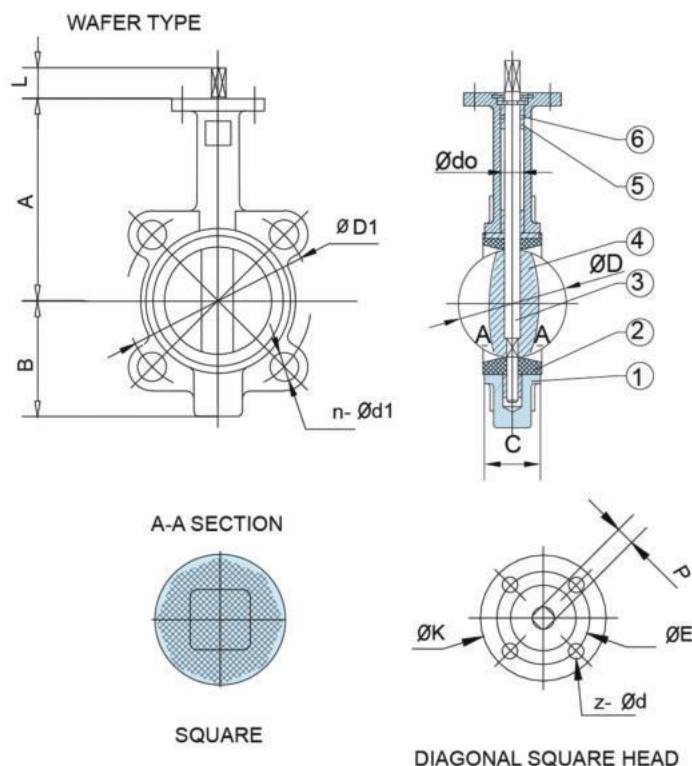

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Stainless Steel
2	Seat	EPDM,NBR,Viton
3	Shaft	Stainless Steel 416,316,304
4	Disc	DI+NI,CF8,CF8M
5	Bushing	PTFE
6	O Ring	NBR

DIMENSIONS

SIZE		A	B	C	D	L	dO	P	UPPER FLANGE			ANSI 150		DIN PN10	
in	DN								K	E	z-d	D1	n-d1	D1	n-d1
2	50	161	80	42	52.6	32	14.3	11	90	70	4-9	120.5	4-19	125	4-18
2-1/2	65	175	89	44.7	64.5	32	14.3	11	90	70	4-9	139.5	4-19	145	4-18
3	80	181	95	45.2	78.8	32	14.3	11	90	70	4-9	152.5	4-19	160	4-18
4	100	200	114	52.1	104	32	15.77	11	90	70	4-9	190.5	8-19	180	8-18
5	125	213	127	54.4	123.3	32	18.92	14	90	70	4-9	216	8-22	210	8-18
6	150	226	139	55.8	155.6	32	18.92	14	90	70	4-9	241.5	8-22	240	8-23
8	200	260	175	60.6	202.5	45	22.1	17	125	102	4-12	298.5	8-22	295	8-23
10	250	292	203	65.6	250.5	45	28.45	22	125	102	4-12	362	12-25	350	12-23
12	300	337	242	76.9	301.6	45	31.6	22	125	102	4-12	432	12-25	400	12-23
14	350	368	267	76.5	333.3	45	31.6	22	125	102	4-12	476	12-29	460	16-23
16	400	400	309	86.5	389.6	51.2	38	24	175	140	4-18	540	16-29	515	16-27
18	450	422	328	105.6	440.5	51.2	42.86	27	175	140	4-18	578	16-32	565	20-27
20	500	480	361	131.8	491.6	64.2	45.72	32	175	140	4-18	635	20-32	620	20-27
24	600	562	459	152	592.5	70.2	53.98	36	210	165	4-23	749.5	20-35	725	20-30



- Type:
Wafer
- Face to Face:
API609,BS5155,DIN3202, ISO5752
- Flange:
DIN,BS,UNI,ISO,ANSI, AS,JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage



• CONCENTRIC BUTTERFLY VALVE



- Water works and water resource project
- Environment protection
- Public facilities
- Power and public utilities
- Building industry
- Petroleum, chemical
- Steel, metallurgy
- Paper making industry
- Foods, Beverage



Butterfly valve as used as shutting-off or throttling unit for petroleum processing, chemicals, food, medicine, textile, paper making, hydroelectricity engineering as well as light industry, etc. it can be installed in any selected position.

CONCENTRIC BUTTERFLY VALVE

Type: Wafer
Face to face: API609, BS5155, DIN3202,
Flange: ISO5752
Mounting Flange: DIN, BS, UNI, ISO, ANSI, AS, JIS
ISO5211

Working Pressure: PN10 (150PSI)
Application: Water works, Public facilities,
Building Industry, Petroleum,
Chemical, Steel, Metallurgy, Paper
Making Industry, Foods, Beverage

Retaining system

The shaft is retained in the body with a retaining ring, a thrust washer and two C-rings, providing a "blow-out proof" shaft assembly. The retaining ring may be easily removed with a standard hand tool on field disassembly.

Shaft

One-piece through shaft ensures dependability and positive disc positioning.

Bushing (4-5)

Shaft bushings reduce torque and isolate the shaft from the valves body, preventing seizure of the shaft due to corrosion in the shaft journal.

Seat/Body

The tongue-and-groove seat to body retention method makes field replacement simple and fast. The resilient seat features lower torque and eliminates the need for flange gaskets.

Disc and shaft Connection

The spline or square connection eliminates shaft retention components being exposed to the line media. Maximum flow is achieved

Mounting Flange

ISO5211 mounting flange accommodates direct mounting of all types of actuators, including: handle, gear operator, electric and pneumatic.

O-Ring (1-2)

Shaft: seal provides further assurance against stem leakage.

Hub Seal

Smooth finished disc flats mate with seat flats to give a highly efficient primary seal that prevents leakage into the shaft area.


Disc

Precision profiles provides bubble-tight shut-off, assures minimum torque and longer seat life.





J222G WAFFER BUTTERFLY VALVE (FOUR HOLES WITH TONGUE - AND - GROOVE SEAT)

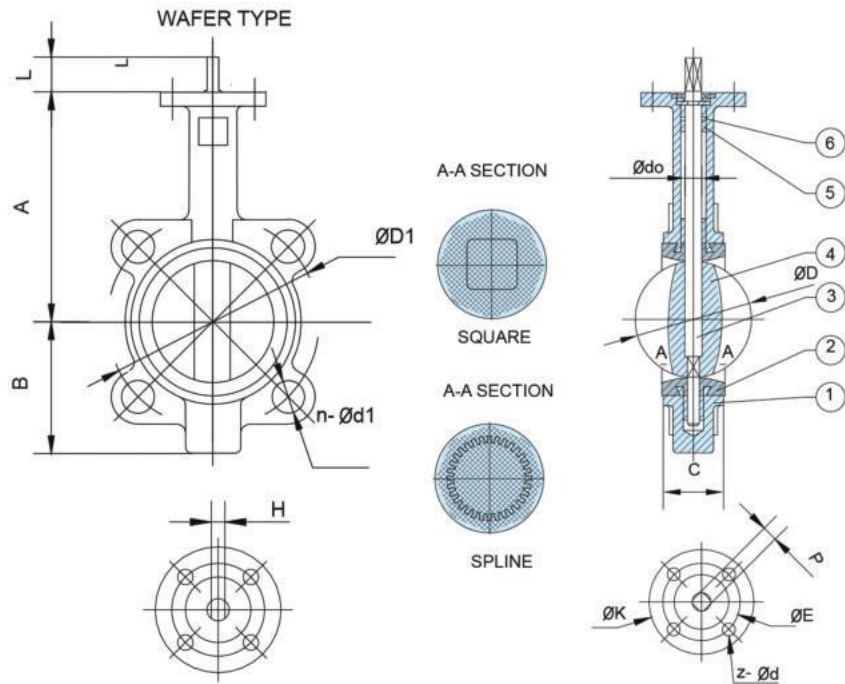

DOUBLE D HEAD

DIAGONAL SQUARE HEAD

- Type:
Wafer
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Carbon Steel, Stainless Steel
2	Seat	NBR, EPDM, Viton, Neoprene, Hypalon, Silicon
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni (Nylon/Epoxy), CF8, CF8M, Bronze
5	Bushing	PTFE
6	O Ring	NBR, EPDM

DIMENSIONS


SIZE	in	DN	A	B	C	D	L	d0	P	H	UPPER FLANGE			ANSI 150		DIN PN10	
											K	E	z-d	D1	n-d1	D1	n-d1
2		50	161	80	42.4	56	32	14.3/12.6	11/9	10	90	70	4-9	120.5	4-19	125	4-18
2-1/2		65	175	89	45.8	67.87	32	14.3/12.6	11/9	10	90	70	4-9	139.5	4-19	145	4-18
3		80	181	95	45.8	80.5	32	14.3/12.6	11/9	10	90	70	4-9	152.5	4-19	160	4-18
4		100	200	114	52	106.1	32	15.77	11	12	90	70	4-9	190.5	8-19	180	8-18
5		125	213	127	55	131	32	18.92	14	14	90	70	4-9	216	8-22	210	8-18
6		150	226	139	55	153.3	32	18.92	14	14	90	70	4-9	241.5	8-22	240	8-23
8		200	260	175	61	204.8	45	22.1	17	17	125	102	4-12	298.5	8-22	295	8-23
10		250	292	203	67.2	255.4	45	28.45	22	22	125	102	4-12	362	12-25	350	12-23
12		300	337	242	77	306.6	45	31.6	22	24	125	102	4-12	432	12-25	400	12-23

NOTE: (1) The maximum working pressure is 1.0 MPa (150PSI) .



WAFFER BUTTERFLY VALVE

J210 WAFFER BUTTERFLY VALVE (TWO HOLES WITH TONGUE - AND - GROOVE SEAT)

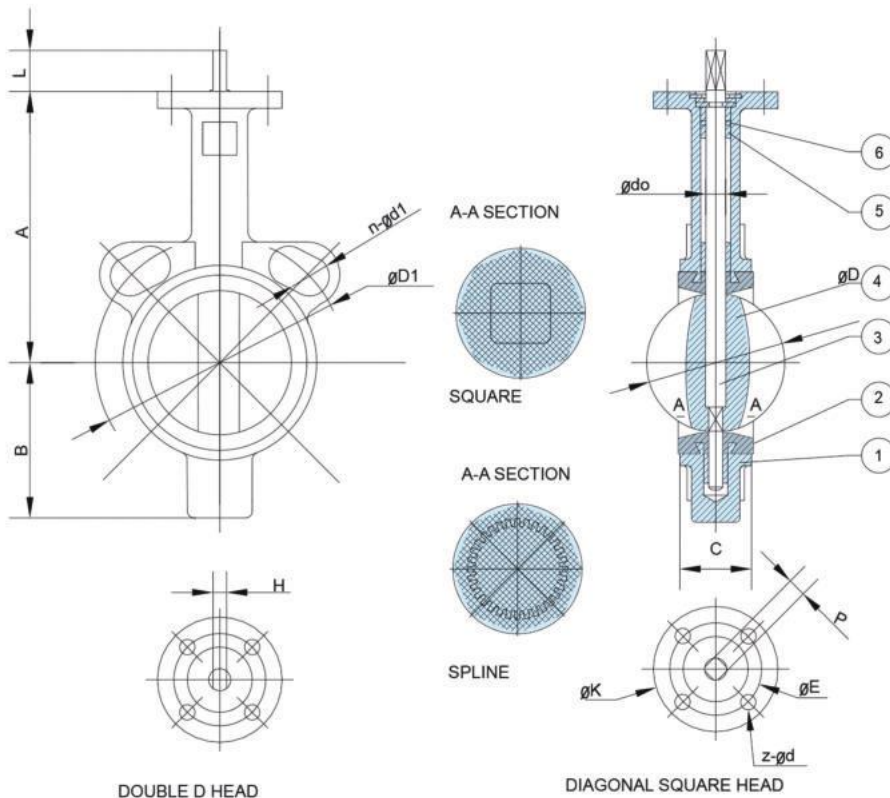

- Type:
Wafer
- Face to Face:
API609,BS5155,DIN3202, ISO5752
- Flange:
DIN,BS,UNI,ISO,ANSI, AS,JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERAILS
1	Body	Cast iron, Ductile iron,Carbon steel, Stainless Steel
2	seat	NBR, EPDM,Viton,Neoprene,Hypalon,Silicon
3	Shaft	Stainless Steel 416, 316,304
4	Disc	Ductile iron+Ni(Nylon/Epoxy), CF8, CF8M, Bronze
5	Bushing	PTFE
6	O Ring	NBR, EPDM

DIMENSIONS


SIZE		A	B	C	D	L	d0	P	H	UPPER FLANGE			ANSI150		DIN PN10/16		JIS 10K	
IN	DN									K	E	Z-d	D1	n-d1	D1	n-d1	D1	n-d
2	50	161	80	42.4	56	32	14.3/12.6	11/9	10	90	70	4-9	120.5	4-19	125	4-18	120	4-19
2-1/2	65	175	89	45.8	67.87	32	14.3/12.6	11/9	10	90	70	4-9	139.5	4-19	145	4-18	140	4-19
3	80	181	95	45.8	80.5	32	14.3/12.6	11/9	10	90	70	4-9	152.5	4-19	160	4/8-18	150	8-19
4	100	200	114	52	106.1	32	15.77	11	12	90	70	4-9	190.5	8-19	180	8-18	175	8-19
5	125	213	127	55	131	32	18.92	14	14	90	70	4-9	216	8-22	210	8-18	210	8-23
6	150	226	139	55	153.3	32	18.92	14	14	90	70	4-9	241.5	8-22	240	8-23	240	8-23
8	200	260	175	61	204.8	45	22.1	17	17	125	102	4-12	298.5	8-22	295	8/12-23	290	12-23
10	250	292	203	67.2	255.4	45	28.45	22	22	125	102	4-12	362	12-25	350/355	12-23/27	355	12-25
12	300	337	242	77	306.6	45	31.6	22	22	125	102	4-12	432	12-25	400/410	12-23/27	400	16-25





- Nominal Diameter: DN40-DN800mm
- Nominal Pressure: PN1.0-PN1.6MPa
- Suitable Medium: Various Corrosiveness Medium
- Suitable Temperature: +10°C-150°C

J212 PTFE COATED BUTTERFLY VALVE (WAFER TYPE)

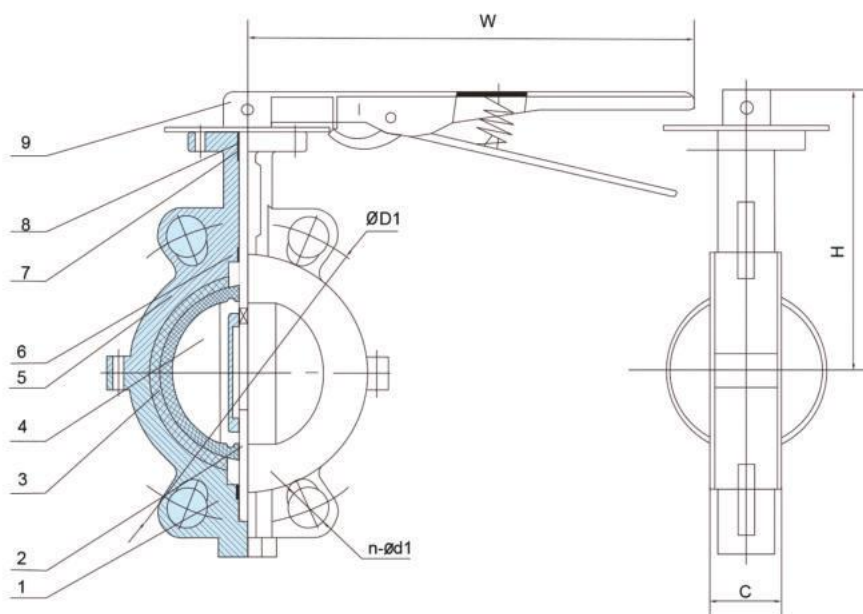


NOMINAL PRESSURE	1.0	MPa
SHELL TEST PRESSURE	1.5	
SEAL TEST PRESSURE	1.1	

STANDARD MATERIALS OF MAIN PARTS

ITEM	PART NAME	MA-	STANDARD
1	Lower Valve Body	Wcb	Cf8m
2	Stem	SS416	SS316
3	Seat	Ptfe	Ptfe
4	Disc	Wcb+Ptfe	Cf8m+Ptfe
5	Upper Valve Body	Wcb	CF8M
6	Bushing	Ptfe	Bronze
7	O Ring	Viton	Viton
8	Bushing	Ptfe	Bronze
9	Handle		

DIMENSIONS

SIZE		C	H	W	ANSI 150		DIN PN10/16	
IN	DN				D1	n-d1	D1	n-d1
1-1/2	40	40	150	270	98.5	4-15	110	4-18
2	50	43	167	270	120.5	4-19	125	4-18
2-1/2	65	46	170	270	139.5	4-19	145	4-18
3	80	46	170	270	152.5	4-19	160	4(4/8)-18
4	100	52	181	270	190.5	4(8)-19	180	4(8)-18
5	125	56	205	270	216	4(8)-22	210	4(8)-18
6	150	56	219	270	241.5	4(8)-22	240	4(8)-23
8	200	60	268	360	298.5	4(8)-22	295	4(8/12)-23
10	250	68	284	500	362	4(12)-25	350/355	4(12)-23/27
12	300	78	337	500	432	4(12)-25	400/410	4(12)-23/27



CONCENTRIC BUTTERFLY VALVE

CONCENTRIC BUTTERFLY VALVE



- Water works and water resource project
- Environment protection
- Public facilities
- Power and public utilities
- Building industry
- Petroleum, chemical
- Steel, metallurgy
- Paper making industry
- Foods, Beverage

Butterfly valve as used as shutting-off or throttling unit for petroleum processing, chemicals, food, medicine, textile, paper making, hydroelectricity engineering as well as light industry, etc. it can be installed in any selected position.

Type: Lugged
Face to face: API609, BS5155, DIN3202, ISO5752
Flange: DIN, BS, UNI, ISO, ANSI, AS, JIS
Mounting Flange: ISO5211

Working Pressure: DN40-300:PN16 (200PSI)
DN350&above: PN10 (150PSI)
Application: Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

Weather Seal

Top bushing keep dust and moisture from entering the upper shaft journal.

Shaft

One-piece through shaft ensures dependability and positive disc positioning.

Bushing(4-5)

Shaft bushings reduce torque and isolate the shaft from the valves body, preventing seizure of the shaft due to corrosion in the shaft journal.

Seat Face

Seat to flange seal eliminates the need for flange gaskets.

Seat

Phonetic-backed seat is non-collapsible, stretch resistant, blow out proof, and field replaceable.

Mounting Flange

ISO5211 mounting flange accommodates direct mounting of all types of actuators, including: handle, gear operator, electric and pneumatic.

O-Ring(1-2)

Shaft seal provides further assurance against stem leakage.

Flats Seal


Smooth finished disc flats mate with seat to give a highly efficient primary seal that prevents leakage into the shaft area.

Taper Pin (1-3)

Precision taper pin ensure positive, vibration proof, shaft to disc connection. Field replaceable.


Disc

Precision profiles provides bubble-tight shut-off, assures minimum torque and longer seat life.

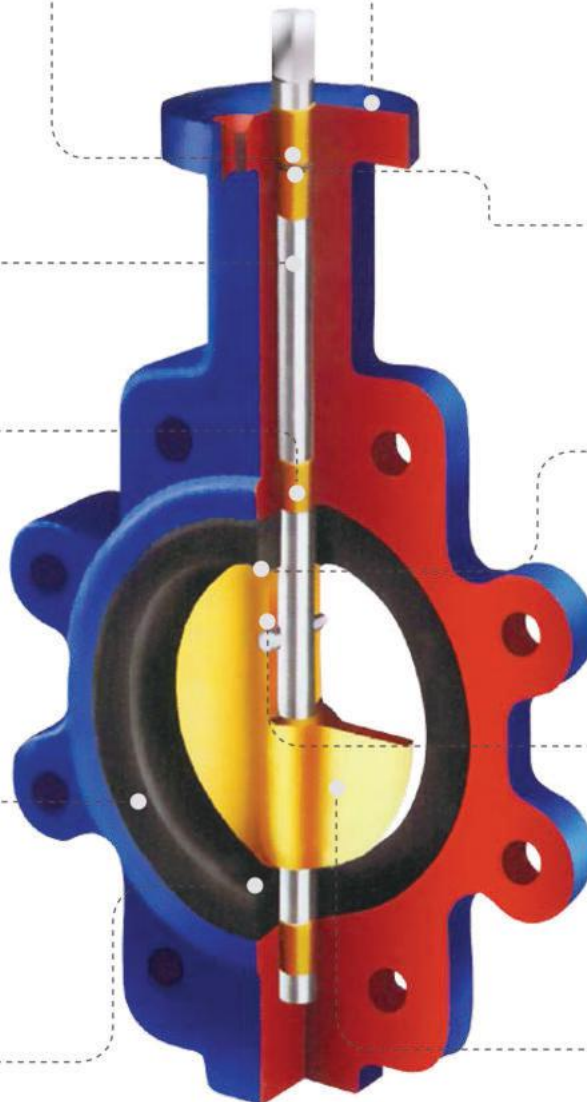

LUG BUTTERFLY VALVE

J333 LUG BUTTERFLY VALVE (THROUGH SHAFT WITHOUT PIN)

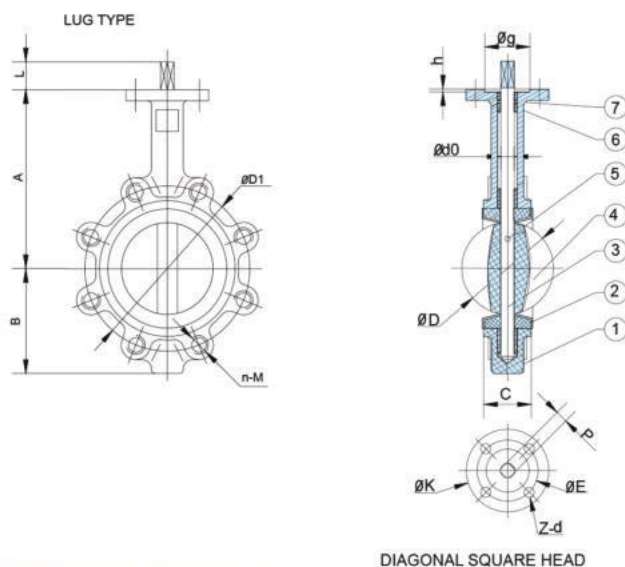

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Carbon Steel, Stainless Steel
2	Seat	NBR, EPDM, Viton, Neoprene, Hypalon, Silicon
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni, CF8, CF8M, Bronze
5	Pin	Stainless Steel
6	Bushing	PTFE, Bronze
7	O Ring	NBR, EPDM

DIMENSIONS

SIZE	in	DN	A	B	C	D	L	d0	P	H	KEY b×1	UPPER FLANGE					ANSI 150		DIN PN10/16	
												K	E	z-d	g	h	D1	n-M	D1	n-M
1-1/2	40	145	75	33	42.4	32	12.6	9	10	3×16	77	77	50	4-7	35	3	98.5	4-1/2"	110	4-M16
2	50	161	80	42	52.6	32	12.6	9	10	3×16	77	77	50	4-7	35	3	120.5	4-5/8"	125	4-M16
2-1/2	65	175	89	44.7	64.5	32	12.6	9	10	3×16	77	77	50	4-7	35	3	139.5	4-5/8"	145	4-M16
3	80	181	95	45.2	78.8	32	12.6	9	10	3×16	77	77	50	4-7	35	3	152.5	4-5/8"	160	4/8-M16
4	100	200	114	52.1	104	32	15.77	11	12	5×19	90	90	70	4-9	55	3	190.5	8-5/8"	180	8-M16
5	125	213	127	54.4	123.3	32	18.92	14	14	5×19	90	90	70	4-9	55	3	216	8-3/4"	210	8-M16
6	150	226	139	55.8	155.6	32	18.92	14	14	5×19	90	90	70	4-9	55	3	241.5	8-3/4"	240	8-M20
8	200	260	175	60.6	202.5	45	22.1	17	17	5×19	125	125	102	4-12	70	35	298.5	8-3/4"	295	8/12-M20
10	250	292	203	65.6	250.5	45	28.45	22	22	8×28	125	125	102	4-12	70	35	362	12-7/8"	350/355	12-M20/M24
12	300	337	242	76.9	301.6	45	31.6	22	24	8×28	125	125	102	4-12	70	35	432	12-7/8"	400/410	12-M20/M24
14	350	368	267	76.5	333.3	45	31.6	22	24	8×28	125	125	102	4-12	70	35	476	12-1"	460/470	16-M20/M24
16	400	400	309	86.5	389.6	51.2	33.15	24	24	8×28	175	175	140	4-18	100	4	540	16-1"	515/525	16-M24/M27
18	450	422	328	105.6	440.5	51.2	38	27	27	8×28	175	175	140	4-18	100	4	578	16-11/8"	565/585	20-M24/M27
20	500	480	361	131.8	491.6	64.2	41.15	32	32	8×28	175	175	140	4-18	100	4	635	20-11/8"	620/650	20-M24/M30
24	600	562	459	152	592.5	70.2	50.65	36	36	8×28	210	210	165	4-23	130	5	749.5	20-11/4"	725/770	20-M27/M33



- Type:
Lugged
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage




J302 LUG BUTTERFLY VALVE (HALF SHAFT WITHOUT PIN)



- Type:
Lugged
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

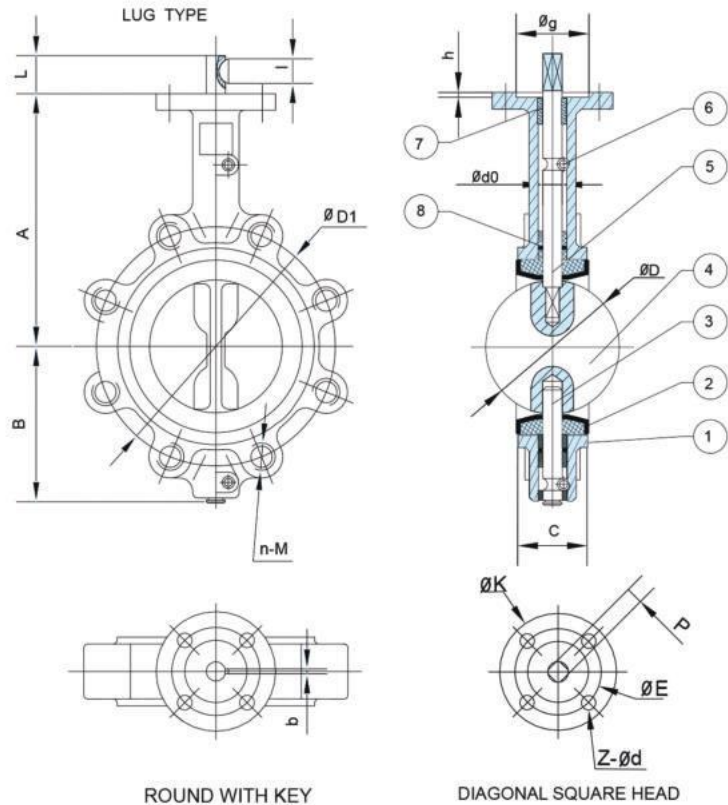

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Carbon Steel, Stainless Steel
2	Seat	NBR, EPDM, PTFE, Viton, Neoprene, Hypalon, Silicon
3	Lower Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni (Nylon/Epoxy), CF8, CF8+PTFE(PFA), CF8M, CF8M+PTFE(PFA), Bronze
5	Upper Shaft	Stainless Steel 416, 316, 304
6	Locating Pin	Carbon Steel
7	Bushing	PTFE
8	O Ring	NBR, EPDM

DIMENSIONS


SIZE		A	B	C	D	L	d0	P	KEY b×1	UPPER FLANGE					ANSI 150		DIN PN10/PN16	
in	DN									K	E	z-d	g	h	D1	n-M	D1	n-M
2	50	161	80	42	52.9	32	12.6	9	3×16	77	50	4-7	35	3	120.5	4-5/8"	125	4-M16
2-1/2	65	175	89	44.7	64.5	32	12.6	9	3×16	77	50	4-7	35	3	139.5	4-5/8"	145	4-M16
3	80	181	95	45.2	78.8	32	12.6	9	3×16	77	50	4-7	35	3	152.5	4-5/8"	160	4/8-M16
4	100	200	114	52.1	104	32	15.77	11	5×19	90	70	4-9	55	3	190.5	8-5/8"	180	8-M16
5	125	213	127	54.4	123.3	32	18.92	14	5×19	90	70	4-9	55	3	216	8-3/4"	210	8-M16
6	150	226	139	55.8	155.6	32	18.92	14	5×19	90	70	4-9	55	3	241.5	8-3/4"	240	8-M20
8	200	260	175	60.6	202.5	45	22.1	17	5×19	125	102	4-12	70	3.5	298.5	8-3/4"	295	8/12-M20
10	250	292	203	65.6	250.5	45	28.45	22	8×19	125	102	4-12	70	3.5	362	12-7/8"	350/355	12-M20/M24
12	300	337	242	76.9	301.6	45	31.6	22	8×19	125	102	4-12	70	3.5	432	12-7/8"	400/410	12-M20/M24

NOTE: (1) The maximum working pressure is 1.6 MPa (200PSI)

(2) For dead end use, the maximum working pressure is 0.8MPa (100PSI)

LUG BUTTERFLY VALVE

J304 LUG BUTTERFLY VALVE (THROUGH SHAFT WITHOUT PIN)

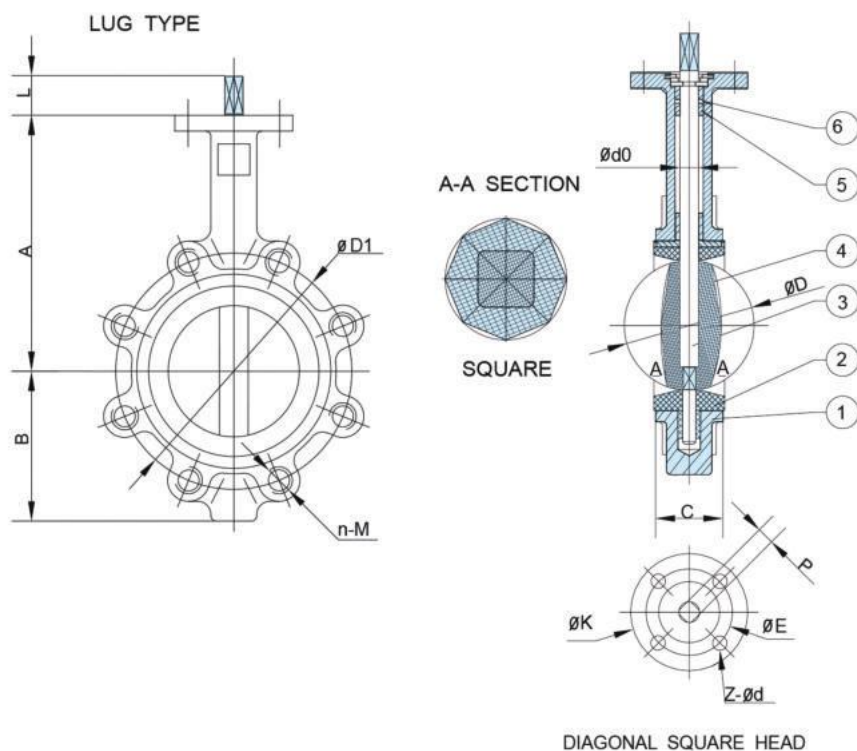

- Type:
Lugged
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS


NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Stainless Steel
2	Seat	EPDM, NBR, Viton
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	DI+NI, CF8, CF8M
5	Bushing	PTFE
6	O Ring	NBR

DIMENSIONS


SIZE		A	B	C	D	L	d0	P	UPPER FLANGE			ANSI 150		DIN PN10	
in	DN								K	E	z-d	D1	n-M	D1	n-M
2	50	161	80	42	52.6	32	14.3	11	90	70	4-9	120.5	4-5/8"	125	4-M16
2-1/2	65	175	89	44.7	64.5	32	14.3	11	90	70	4-9	139.5	4-5/8"	145	4-M16
3	80	181	95	45.2	78.8	32	14.3	11	90	70	4-9	152.5	4-5/8"	160	4-M16
4	100	200	114	52.1	104	32	15.77	11	90	70	4-9	190.5	8-5/8"	180	8-M16
5	125	213	127	54.4	123.3	32	18.92	14	90	70	4-9	216	8-3/4"	210	8-M16
6	150	226	139	55.8	155.6	32	18.92	14	90	70	4-9	241.5	8-3/4"	240	8-M20
8	200	260	175	60.6	202.5	45	22.1	17	125	102	4-12	298.5	8-3/4"	295	8-M20
10	250	292	203	65.6	250.5	45	28.45	22	125	102	4-12	362	12-7/8"	350	12-M20
12	300	337	242	76.9	301.6	45	31.6	22	125	102	4-12	432	12-7/8"	400	12-M20
14	350	368	267	76.5	333.3	45	31.6	22	125	102	4-12	476	12-1"	460	16-M20
16	400	400	309	86.5	389.6	51.2	38	24	175	140	4-18	540	16-1"	515	16-M24
18	450	422	328	105.6	440.5	51.2	42.86	27	175	140	4-18	578	16-11/8"	565	20-M24
20	500	480	361	131.8	491.6	64.2	45.72	32	175	140	4-18	635	16-11/8"	620	20-M24
24	600	562	459	152	592.5	70.2	53.98	36	210	165	4-23	749.5	20-11/4"	725	20-M27



J303 LUG BUTTERFLY VALVE (HALF SHAFT WITHOUT PIN)

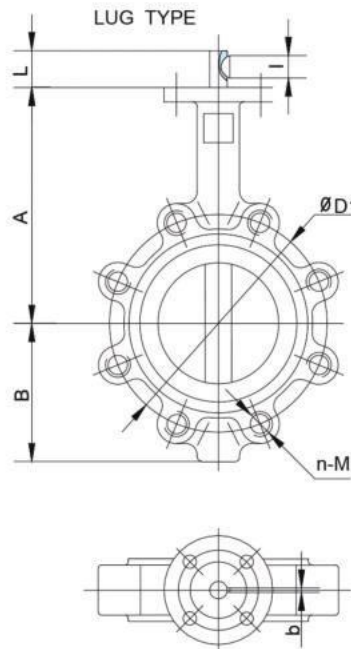

ROUND WITH KET

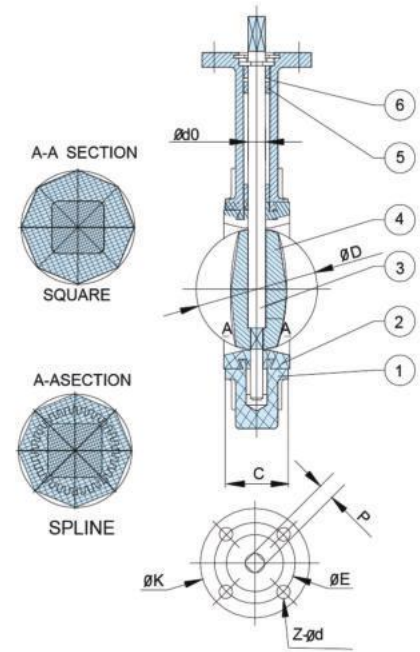

DIAGONAL SQUARE HEAD

- Type:
Lugged
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron, Carbon Steel, Stainless Steel
2	Seat	NBR, EPDM, Viton, Neoprene, Hypalon, Silicon
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni (Nylon/Epoxy), CF8, CF8M, Bronze
5	Bushing	PTFE
6	O Ring	NBR, EPDM

DIMENSIONS


SIZE		A	B	C	D	L	d0	P	KEY bXl	UPPER FLANGE			ANSI 150			DIN/PN10	
in	DN									K	E	z-d	D1	n-M	D1	n-M	
2	50	161	80	42.4	56	32	14.3/12.6	11/9	3×16	90	70	4-9	120.5	4-5/8"	125	4-M16	
2-1/2	65	175	89	45.8	67.87	32	14.3/12.6	11/9	3×16	90	70	4-9	139.5	4-5/8"	145	4-M16	
3	80	181	95	45.8	80.5	32	14.3/12.6	11/9	3×16	90	70	4-9	152.5	4-5/8"	160	4-M16	
4	100	200	114	52	106.1	32	15.77	11	5×19	90	70	4-9	190.5	8-5/8"	180	8-M16	
5	125	213	127	55	131	32	18.92	14	5×19	90	70	4-9	216	8-3/4"	210	8-M16	
6	150	226	139	55	153.3	32	18.92	14	5×19	90	70	4-9	241.5	8-3/4"	240	8-M20	
8	200	260	175	61	204.8	45	22.1	17	5×19	125	102	4-12	298.5	8-3/4"	295	8-M20	
10	250	292	203	67.2	255.4	45	28.45	22	8×28	125	102	4-12	362	12-7/8"	350	12-M20	
12	300	337	242	77	306.6	45	31.6	22	8×28	125	102	4-12	432	12-7/8"	400	12-M20	

NOTE: (1) The maximum working pressure is 1.0 MPa (150PSI).

(2) For dead end use, the maximum working pressure is 0.5MPa (75PSI).

LUG BUTTERFLY VALVE

J308 PTFE COATED BUTTERFLY VALVE (LUG TYPE)

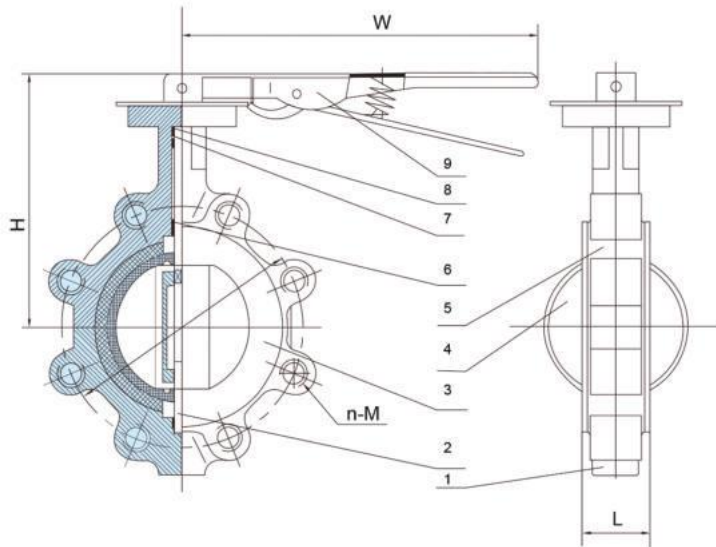

NOMINAL PRESSURE	1.0	MPa
SHELL TEST PRESSURE	1.5	
SEAL TEST PRESSURE	1.1	

- Nominal Diameter: DN40-DN800mm
- Nominal Pressure: PN1.0-PN1.6MPa
- Suitable Medium: Various Corrosiveness Medium
- Suitable Temperature: +10°C-150°C

STANDARD MATERIALS OF MAIN PARTS

ITEM	PART NAME	MATERIAL
1	LOWER VALVE BODY	WCB CF8M
2	Stem	SS416 SS316
3	Seat	PTFE PTFE
4	Disc	WCB+PTFE CF8M+PTFE
5	Upper Valve Body	WCB CF8M
6	Bushing	PTFE Bronze
7	O Ring	Viton Viton
8	Bushing	PTFE Bronze
9	Handle	

DIMENSIONS AND WEIGHTS

SIZE		H	L	W	ANSI 150		DIN PN10/16	
IN	DN				D1	n-M	D1	n-M
1-1/2	40	150	40	270	98.5	4-1/2"	110	4-M16
2	50	167	43	270	120.5	4-5/8"	125	4-M16
2-1/2	65	170	46	270	139.5	4-5/8"	145	4-M16
3	80	170	46	270	152.5	4-5/8"	160	4/8-M16
4	100	181	52	270	190.5	8-5/8"	180	8-M16
5	125	205	56	270	216	8-3/4"	210	8-M16
6	150	219	56	270	241.5	8-3/4"	240	8-M20
8	200	268	60	360	298.5	8-3/4"	295	8/12-M20
10	250	284	68	500	362	12-7/8"	350/355	12-M20/M24
12	300	337	78	500	432	12-7/8"	400/410	12-M20/M24







- Type:
Flange
- Face to Face:
BS5155, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage



J310 CONCENTRIC FLANGED BUTTERFLY VALVE

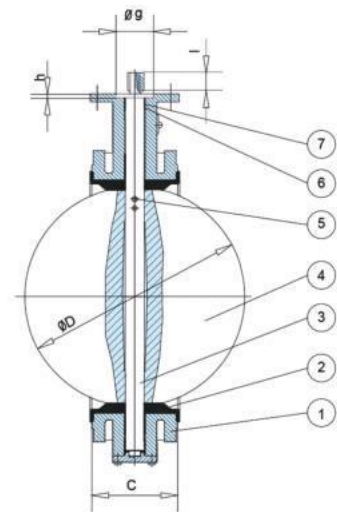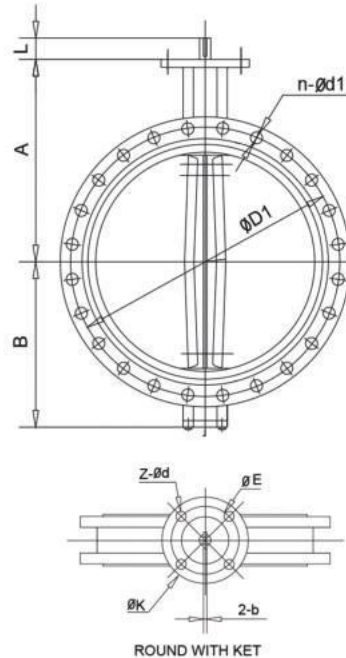

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron
2	Seat	NBR, EPDM
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni, CF8, CF8M, Bronze
5	Pin	Stainless Steel
6	Bushing	PTFE, Bronze
7	O Ring	NBR, EPDM


DIMENSIONS

SIZE	in	DN	A	B	C	D	L	KEY b×1	UPPER FLANGE					ANSI 150		DIN PN10/PN16	
									K	E	z-d	g	h	D1	n-d1	D1	n-d1
2	50	120	83	108	52.9	32	32	3×16	70	50	4-7	35	3	120.5	4-19	125	4-18
2½	65	130	93	112	64.5	32	32	3×16	70	50	4-7	35	3	139.5	4-19	145	4-18
3	80	145	100	114	78.8	32	32	3×16	70	50	4-7	35	3	152.5	4-19	160	4/8-18
4	100	155	114	127	104	32	32	5×19	90	70	4-9	55	3	190.5	8-19	180	8-18
5	125	170	125	140	123.3	32	32	5×19	90	70	4-9	55	3	216	8-22	210	8-18
6	150	190	143	140	155.6	32	32	5×19	90	70	4-9	55	3	241.5	8-22	240	8-23
8	200	205	170	152	202.5	45	45	5×19	125	102	4-12	70	3.5	298.5	8-22	295	8/12-23
10	250	235	198	165	250.5	45	45	8×28	125	102	4-12	70	3.5	362	12-25	350/355	12-23/27
12	300	280	223	178	301.6	45	45	8×28	140	102	4-12	70	3.5	432	12-25	400/410	12-23/27
14	350	310	279	190	333.3	45	45	8×28	140	102	4-12	70	3.5	476	12-29	460/470	16-23/27
16	400	340	300	216	389.6	51.2/72	51.2/72	10×50	175	140	4-18	100	4	540	16-29	515/525	16-27/30
18	450	375	345	222	440.5	51.2/72	51.2/72	10×50	175	140	4-18	100	4	578	16-32	565/585	20-27/30
20	500	430	355	229	491.6	52.7/75	52.7/75	10×50	175	140	4-18	100	4	635	20-32	620/650	20-27/33
24	600	500	410	267	592.5	70.2/80	70.2/80	2-16×60	210	165	4-23	130	5	749.5	20-35	725/770	20-30/36
28	700	560	478	292	695	66/82	66/82	2-18×63	300	254	8-18	200	5.5	863.5	28-35	840	24-30/36
32	800	620	529	318	794.7	66/82	66/82	2-18×63	300	254	8-18	200	5.5	978	28-41	950	24-33/39
36	900	665	584	330	864.7	118	118	2-20×100	300	254	8-18	200	5.5	1086	32-41	1050	28-33/39
40	1000	735	657	410	965	141	141	2-22×140	300	254	8-18	200	5.5	1200	36-41	1160/1170	28-36/42

NOTE: (1) The maximum working pressure is 1.6 Mpa(200PSI) for 11/2"-12", 1.0MPa (150PSI) for 14" and larger.
(2) 14"-24" maximum working pressure of 1.6Mpa(200PSI) can be supplied as per specified order requirement.

GROVED END BUTTERFLY VALVE

J312 GROOVED END BUTTERFLY VALVE

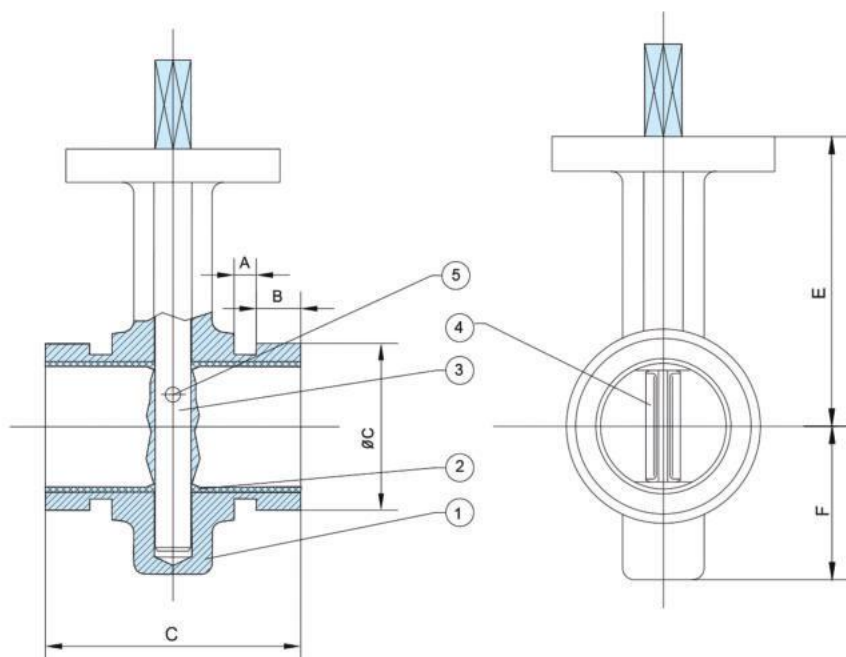

- Type:
Grooved
- Flange:
DIN,BS,UNI,ISO,ANSI
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron
2	Seat	NBR, EPDM
3	Shaft	Stainless Steel 416, 316, 304
4	Disc	Ductile Iron+Ni,CF8, CF8M
5	Pin	Stainless Steel

DIMENSIONS

SIZE		A	B	C	L	E	F
in	DN						
2	50	8	16	60	92	100	53
2-1/2	65	8	16	76	102	108	61
3	80	8	16	89	102	114	68
4	100	10	16	114	116	136	85
5	125	10	16	141	125	162	99
6	150	10	16	165	125	174	111
8	200	11	19	219	138	230	145







J314 RESILIENT SEATED ECCENTRIC FLANGED BUTTERFLY VALVE

- Type:
Flanged
- Face to Face:
API609, BS5155, DIN3202, ISO5752
- Flange:
DIN, BS, UNI, ISO, ANSI, AS, JIS
- Mounting Flange:
ISO5211

-
- Working Pressure:
PN10
 - Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage

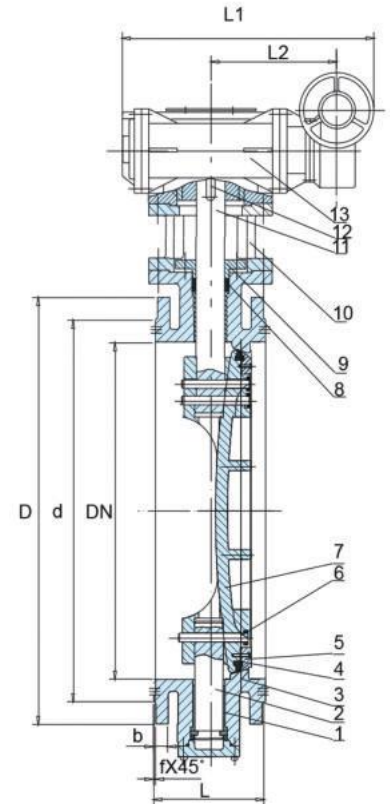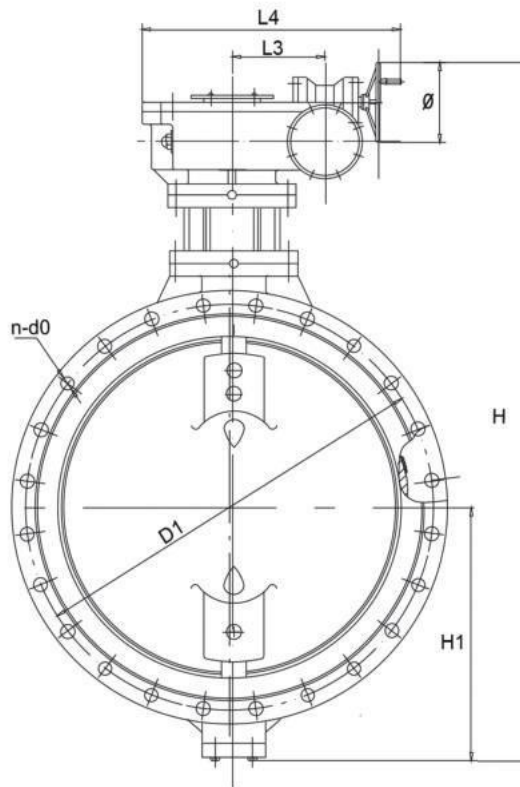

ECCENTRIC FLANGED BUTTERFLY VALVE

RESILIENT SEATED ECCENTRIC FLANGED BUTTERFLY VALVE


STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Bushing	Bronze/PTFE
2	Bottom Shaft	Stainless Steel 420
3	Body	Cast Iron/Ductile Iron
4	Disc Sealing Ring	NBR
5	Retainer	Carbon Steel
6	Taper Pin	Stainless Steel 420
7	Disc	Ductile Iron
8	Sealing Ring	NBR
9	Stuffing Flange	Ductile Iron
10	Support	Ductile Iron
11	Top Shaft	Stainless Steel 420
12	Key	Carbon Steel
13	Actuator	Worm gear Actuator

DN	d	DI	D	H	H1	L			L1	L2	L3	L4	f	Φ	b	n-d0
		PN10				SHORT BODY	MIDDLE BODY	LONG BODY								PN10
DN100(4")	156	180	220	419	109	/	127	190	97	45	158	210	3	150	19	8-19
DN150(6")	211	240	285	583	143	/	140	210	97	45	158	210	3	150	19	8-23
DN200(8")	266	295	340	692	182	89	152	230	140	63	238	315	3	300	20	8-23
DN250(10")	319	350	395	784	219	114	165	250	140	63	238	315	3	300	22	12-23
DN300(12")	370	400	445	874	244	114	178	270	167	72	167	242	4	300	24.5	12-23
DN350(14")	429	460	505	998	283	127	190	290	201	91	188	275	4	400	24.5	16-23
DN400(16")	480	515	565	1062	312	140	216	310	201	91	188	275	4	400	24.5	16-28

DN	d	D1	D	H	H1	L			L1	L2	L3	L4	f	Φ	b	n-d0
		PN10				SHORT BODY	MIDDLE BODY	LONG BODY								PN10
DN450(18")	530	565	615	1164	344	152	222	330	473	147	109	420	4	400	25.5	20-28
DN500(20")	582	620	670	1226	381	152	229	350	473	147	109	420	4	400	26.5	20-28
DN600(24")	682	725	780	1380	450	178	267	390	533	179	138	476	5	400	30	20-31
DN700(28")	794	840	895	1585	535	229	292	430	533	179	138	476	5	400	32.5	24-31
DN800(32")	901	950	1015	1750	590	241	318	470	655	217	170	577	5	500	35	24-34
DN900(36")	1001	1050	1115	1840	643	241	330	510	655	217	170	577	5	500	37.5	28-34
DN1000(40")	1112	1160	1230	1999	722	300	410	550	655	217	170	577	5	500	40	28-37
DN1200(48")	1328	1380	1455	2351	840	350	470	630	748	262	202	664	5	500	45	32-40

J316 METAL SEALED ECCENTRIC BUTTERFLY VALVE (WAFER TYPE)

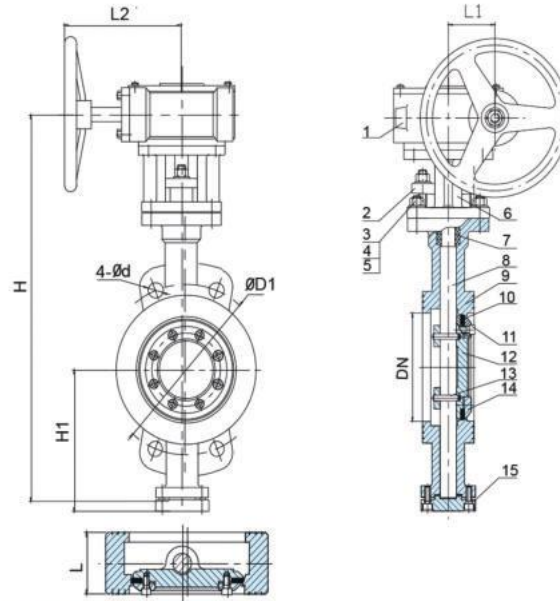

- Type:
Wafer
- Flange:
DIN,BS,UNI,ISO,ANSI, AS,JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building
Industry, Petroleum, Chemical, Steel,
Metallurgy, Paper Making Industry,
Foods, Beverage

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	DIMENSIONS
1	Wormgear Actuator	Components
2	Packing Flange	Carbon Steel
3	Stud	Carbon Steel
4	Washer	Spring Steel
5	Bolt	Carbon Steel
6	Correcting Suppor	Carbon Steel
7	packing	Flexible Graphite
8	Stem	Stainless Steel 420
9	Body	Carbon Steel ,CF8 CF8M
10	Sealing Ring	SS316 + Flexible Graphite
11	Bolt	Carbon Steel
12	Disc	Carbon Steel ,CF8 CF8M
13	pin	Stainless Steel 420
14	Disc Flange	Carbon Steel
15	End Cover	Carbon Steel


DIMENSIONS

DN	L	H	H1	L1	L2	D1	4-Ød
DN50(2")	43	250	80	48	145	125	4-18
DN65(2.5")	46	265	95	48	145	145	4-18
DN80(3")	49	275	100	48	145	160	4-18
DN100(4")	56	400	125	48	145	180	4-18
DN125(5")	64	420	135	70	175	210	4-18
DN150(6")	70	480	172	70	175	240	4-22
DN200(8")	71	530	240	90	200	295	4-22
DN250(8")	76	640	265	90	200	350	4-22
DN300(12")	83	720	295	125	280	400	4-22
DN350(14")	92	770	330	125	280	460	4-22
DN400(16")	102	880	370	125	280	515	4-26
DN450(18")	114	930	395	130	280	565	4-26
DN500(20")	127	1000	430	130	280	620	4-26
DN600(24")	154	1130	490	175	365	725	4-30
DN700(28")	165	1270	545	175	365	840	4-30
DN800(32")	190	1560	615	225	440	950	4-33
DN900(36")	203	1700	700	225	440	1050	4-33
DN1000(40")	216	1865	715	290	490	1160	4-36



ECCENTRIC FLANGED BUTTERFLY VALVE

J318 METAL SEALED ECCENTRIC BUTTERFLY VALVE (FLANGE TYPE)

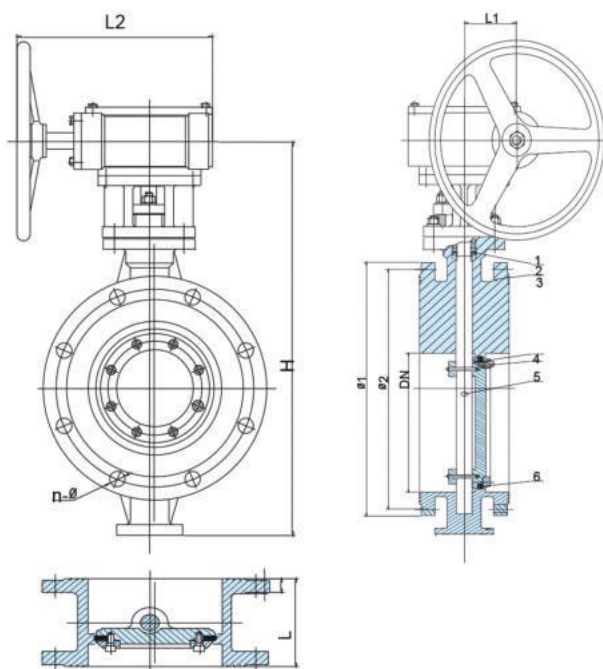

NO.	PART	MATERIALS
1	Packing	Graphite
2	Body	Carbon steel, Stainless steel
3	Disc	Carbon steel, Stainless steel
4	Bolts	Carbon steel, Stainless steel
5	Shaft	Carbon steel, Stainless steel
6	Seat	PTFE, stainless steel

SIZE	DN	L	H	DIN PN10/16			L1	L2
				Φ1	Φ2	N-Φ		
DN50	Φ50	108	320	Φ165	Φ125	4-Φ18	40	130
DN65	Φ65	112	370	Φ185	Φ145	4-Φ18	40	130
DN80	Φ80	114	370	Φ200	Φ160	4/8-Φ18	40	130
DN100	Φ100	127	370	Φ220	Φ180	8-Φ18	48	145
DN125	Φ125	140	420	Φ250	Φ210	8-Φ18	70	175
DN150	Φ150	140	505	Φ285	Φ240	8-Φ22	70	175
DN200	Φ200	152	610	Φ340	Φ295	8/12-Φ22	90	200
DN250	Φ250	165	665	Φ395/Φ405	Φ350/Φ355	12-Φ23/Φ26	90	200
DN300	Φ300	178	755	Φ445/Φ460	Φ400/Φ410	12-Φ23/Φ26	125	280
DN350	Φ350	190	860	Φ505/Φ520	Φ460/Φ470	16-Φ23/Φ26	125	280
DN400	Φ400	216	890	Φ565/Φ580	Φ515/Φ525	16-Φ26/Φ30	125	280
DN500	Φ500	229	1040	Φ670/Φ715	Φ620/Φ650	20-Φ26/Φ33	130	280
DN600	Φ600	267	1285	Φ780/Φ840	Φ725/Φ770	20-Φ30/Φ36	175	365




- Type:
Flange
- Flange:
DIN,BS,UNI,ISO,ANSI, AS,JIS
- Mounting Flange:
ISO5211

- Working Pressure:
PN16(200PSI)
- Application:
Water works, Public facilities, Building Industry, Petroleum, Chemical, Steel, Metallurgy, Paper Making Industry, Foods, Beverage



• GATE VALVE

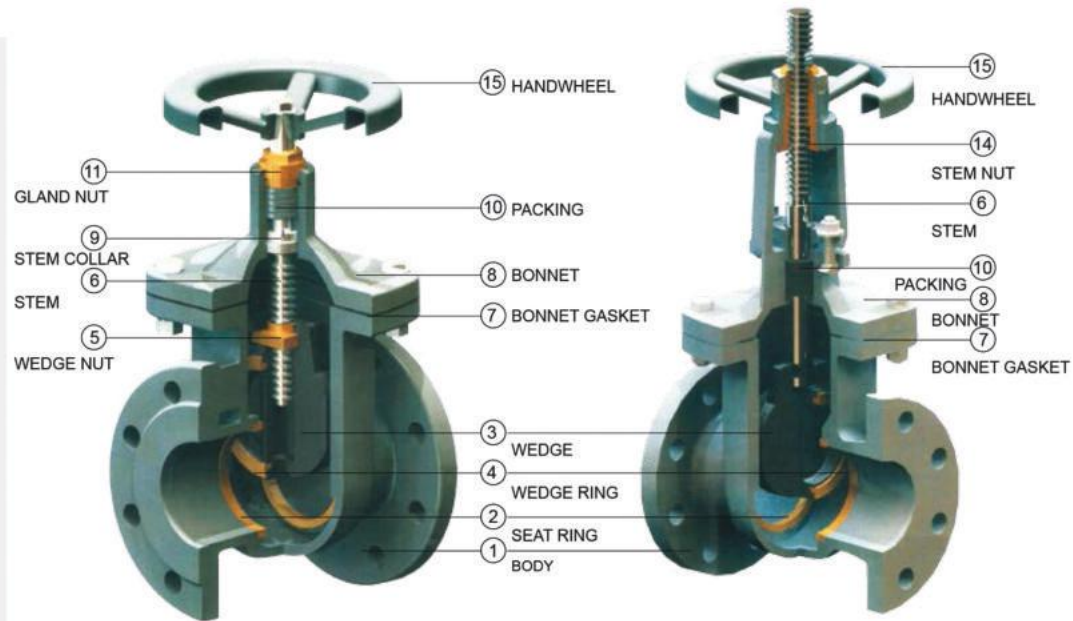

Top sealing

- 1. Reliable seal, long service life, easy to maintain, high temperature resistant and incorrodible.
- 2. Low open torque, turning freely, suitable for resilient seal gate valve
- 3. Low open torque, turning freely, easy to maintain
- 4. Reliable sea, long service life, easy to install and maintain

Body

Oval bore design to ensure good compression and deformation resist performance. Body surface with FEB coated to ensure good ageing resistance & weather resisting property.

Handwheel

Handwheel with tapered square hole, easy to install and fasten.

Seat

Embedded type seat, safety and integrated.

Gasket

Compound Graphite gasket, good performance and long service life.

Stem Nut

Cooper stem nut. Good anticorrosion performance.

Disc

Disc with guide groove to protect the sealing face, also to ensure on-off freely.

Bolt, Nut, Half Ring

Stem is oriented by half ring and double bolt&nuts to ensure the disc on-off freely.

Packing

Soft graphite, long service life, easy to sealing and maintain.



GATE VALVE

● **Application:**

The series of gate valve is specially designed to suit for transportation, distribution and extraction system in water, air, low pressure steam, gas and petroleum industry, not recommend for steam service.

● **Normal Features:**


- 1.Renewable Brass or Bronze Seat Ring.
- 2.Non-Asbestos Packing and Gasket.
- 3.Disc seat ring in all sizes are present into disc.
- 4.Big flow area, small flow resistance coefficient and good leak tightness in high pressure
- 5.Widely use field, good adaptability.
- 6.No direction demand, easy to install in pipe.
- 7.Good material washability.

● **Service conditons:**

Normal: temperature from -10 degree to 120 degree for Brass or Bronze seat

ITEM NO.	PART NAME	MATERIAL	SPECIFICATION	
1	BODY	CAST IRON	GG25	ASTM A126B
		DUCTILE IRON	GGG50	ASTM A536
2	SEAT RING	BRASS	BRASS	ASTM B16
		BRONZE	BRONZE	ASTM B62
3	WEDGE	CAST IRON	GG25	ASTM A126B
		DUCTILE IRON	GGG50	ASTM A536
4	WEDGE RING	BRASS	BRASS	ASTM B16
		BRONZE	BRONZE	ASTM B62
5	WEDGE NUT	BRASS	BRASS	ASTM B16
6	STEM	STAINLESS/STEEL	20CR13	SS416
		BRASS	BRASS	ASTM B16
7	BONNET GASKET	GRAPHITE+STEEL	GRAPHITE+STEEL	GRAPHITE+STEEL
8	BONNET	CAST IRON	GG25	ASTM A126B
		DUCTILE IRON	GGG50	ASTM A536
9	STEM COLLAR	STAINLESS STEEL	20CR13	SS410
10	PACKING	GRAPHITE	GRAPHITE	GRAPHITE
11	GLAND NUT	BRASS	BRASS	ASTM B16
12	STUFFING BOX	CAST IRON	GG25	ASTM A126B
		DUCTILE IRON	GGG50	ASTM A536
13	GLAND FLOWLER	DUCTILE IRON	GGG50	ASTM A536
14	STEM NUT	BRASS	BRASS	ASTM B16
15	HANDWHEEL	DUCTILE IRON	GGG50	ASTM A536

J402 NON-RISING STEAM SOLID WEDGE GATE VALVE (ANSI B16.10)

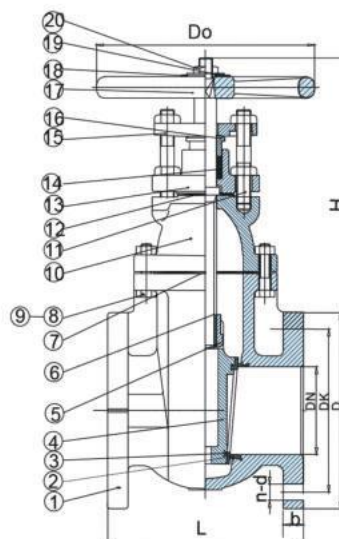

DIMENSIONS IN INCHES AND MILLIMETRES


DN	L	Dk	D	b	n-d	Do	H
2"	178	121	152	15.9	4-19	178	289
2.5"	190.5	140	178	17.5	4-19	178	323
3"	203.2	152.5	190	19.1	4-19	200	338
4"	228.6	190.5	228.6	23.5	8-19	254	411
5"	254	215.9	254	23.8	8-22	300	503
6"	266.7	241.3	279.4	25.4	8-22	300	558
8"	292	298.5	343	28.6	8-22	348	650
10"	330	362	406	30.2	12-25	400	770
12"	356	432	483	31.8	12-25	457	861
14"	381	476	533	35	12-29	508	991
16"	406	540	597	36.6	16-29	558	1058
18"	432	578	635	39.7	16-32	610	1206
20"	457	635	699	42.9	20-32	640	1276
24"	508	749	813	47.6	20-35	762	1466
30"	610	914	984	54	28-35	813	1845
36"	711	1086	1168	60.3	32-42	813	2124

NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	ASTM A126 CLASS B
2	Seat Rings	Cast Bronze	ASTM B62
3	Wedge Face Rings	Cast Bronze	ASTM B62
4	Wedge	Cast Iron	ASTM A126 CLASS B
5	Wedge Nut	Cast Brass	ASTM B62
6	Stem	Brass	ASTM B16
7	Body Gasket	Graphite	NON ASBESTOS
8	Bolts	Steel	ASTM A307 B
9	Nuts	Steel	ASTM A307 B
10	Bonnet	Cast Iron	ASTM A126 CLASS B
11	Gland Follower Bolts	Steel	ASTM A307 B
12	Suffing Box Gasket	Graphite	ASTM A126 CLASS B
13	Suffing Box	Cast Iron	ASTM A307 B
14	Packing	Graphite	NON ASBESTOS
15	Gland Follower	Ductile Iron	ASTM A536 65-45-12
16	Packing Gland	Cast Brass	ASTM B584
17	Handwheel	Cast Iron	ASTM A126 CLASS B
18	Identification Plate	Aluminium	
19	Washer	Steel	ASTM A307 B
20	Handwheel Nut	Steel	ASTM A307 B



GATE VALVE

J444 NON-RISING STEAM SOLID WEDGE GATE VALVE (BS5150)

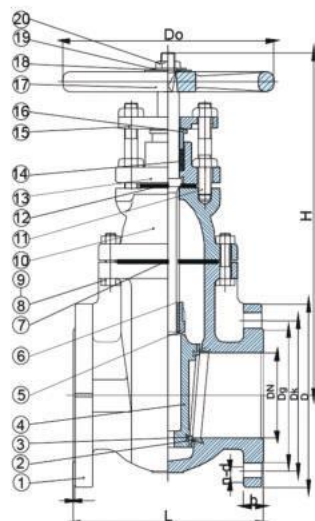

DIMENSIONS-INCHES AND MILLIMETRES

VALVE SIZE	DIM.								
	L	Dg	Dk	D	b	f	n-d	Do	H
50	178	102	125	165	20	2	4-19	178	210
65	190.5	122	145	185	20	2	4-19	178	237
80	203.2	138	160	200	22	2	8-19	200	274
100	228.6	158	180	220	24	2	8-19	254	300
125	254	188	210	250	26	2.5	8-19	300	364
150	266.7	212	240	285	26	2.5	8-23	300	404
200	292	268	295	340	30	2.5	12-23	348	497
250	330	320	355	405	32	2.5	12-28	400	590
300	356	378	410	460	32	2.5	12-28	457	667
350	381	438	470	520	36	3	16-28	508	882
400	406	490	525	580	38	3	16-31	558	956
450	432	550	585	640	40	3	20-31	610	1027
500	457	610	650	715	42	3	20-34	640	1106
600	508	725	770	840	48	3.5	20-37	762	1258

NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	BS1452 Cr.180
2	Seat Rings	Cast Bronze	BS1400 LG2
3	Wedge Face Rings	Cast Bronze	BS1400 LG2
4	Wedge	Cast Iron	BS1452 Cr.180
5	Wedge Nut	Cast Bronze	BS1400 LG2
6	Stem	Brass	BS2874 CZ122
7	Body Gasket	Graphite	BS2494 Type W
8	Bolts	Steel	BS970 43A
9	Nuts	Steel	BS970 43A
10	Bonnet	Cast Iron	BS1452 Cr.180
11	Gland Follower Bolts	Steel	BS970 43A
12	Stuffing Box Gasket	Graphite	BS2494 Type W
13	Stuffing Box	Cast Iron	BS1452 Cr.180
14	Packing	Graphite	BS2494 Type W
15	Gland Follower	Ductile Iron	BS2789 Gr.420-12
16	Packing Gland	Cast Brass	BS1400 PCB1
17	Handwheel	Cast Iron	BS1452 Cr.180
18	Identification Plate	Aluminium	
19	Washer	Steel	BS970 43A
20	Handwheel Nut	Ductile Iron	BS2789 Gr.420-12




- Conforms to BS5150 PN16 & BS5163
- Flanges drilled to BS4504
- Face to Face dimensions conform to BS5150 Series 3.
- Nominal pressure:1.6Mpa
- Seat Test pressure: 1.6Mpa
- Shell Test pressure:2.4Mpa
- Suitable temperatures≤ 230℃
- Suitable media: water, oil, gas





NON-RISING STEAM METAL SEATED GATE VALVE (DIN 3202 F4/F5)

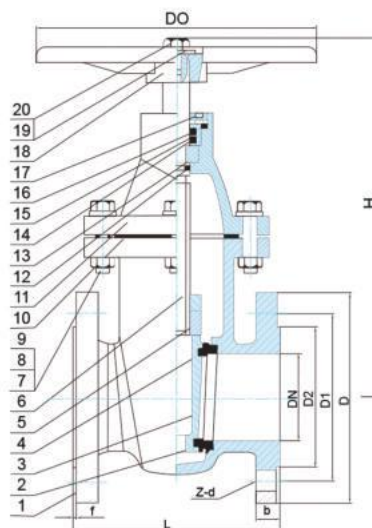

- Conforms to DIN3352
- Face to Face dimensions conform to F4/F5 of DIN3202.
- Flanges drilled to DIN 2532/ DN 2533
- Suitable media: water, oil, gas.

CAST IRDN GATE VALVE FLANGED NRS TD DIN3352 PN16


DN	D	D1	D2	L		b	H	f	Z-d	D0
				F4	F5					
Ø40	Ø150	Ø110	Ø84	140	240	18	214	3	4-Ø19	Ø180
Ø50	Ø165	Ø125	Ø99	150	250	20	232	3	4-Ø19	Ø200
Ø65	Ø185	Ø145	Ø118	170	270	20	258	3	4-Ø19	Ø200
Ø80	Ø200	Ø160	Ø132	180	280	22	281	3	8-Ø19	Ø220
Ø100	Ø220	Ø180	Ø156	190	300	24	315	3	8-Ø19	Ø250
Ø125	Ø250	Ø210	Ø184	200	325	26	358	3	8-Ø19	Ø280
Ø150	Ø285	Ø240	Ø211	210	350	26	408	3	8-Ø23	Ø280
Ø200	Ø340	Ø295	Ø266	230	400	30	500	3	12-Ø23	Ø320
Ø250	Ø405	Ø355	Ø319	250	450	32	572	3	12-Ø28	Ø350
Ø350	Ø520	Ø470	Ø429	270	500	36	751	4	16-Ø28	Ø450
Ø400	Ø580	Ø525	Ø480	290	550	38	832	4	16-Ø31	Ø450

DN	PART NAME	MATERIAL	STANDARD
1	Body	Gray Cast Iron	GG25
2	Body Seat Ring	Brass	
3	Wedge	Ductile Iron	GGG50
4	Wedge Seat Ring	Brass	
5	Stem Nut	Brass	
6	Stem	Stainless Steel	2Cr13
7	Bonnet Bolt	Carbon Steel	A3
8	Nut	Carbon Steel	A3
9	Washer	Carbon Steel	A3
10	Gasket	Nbr	
11	Bonnet	Gray Cast Iron	GG25
12	O-Ring	Nbr	
13	Locating Ring	Brass	
14	O-Ring	Nbr	
15	Bonnet Nut	Brass	
16	Minipad	Tfl	
17	Dust Ring	Nbr	
18	Wheel	Ductile Iron	GGG50
19	Washer	Carbon Steel	A3
20	Bolt	Carbon Steel	A3



GATE VALVE

J406 RISING STEAM SOLID WEDGE GATE VALVE (ANSI B16.10)

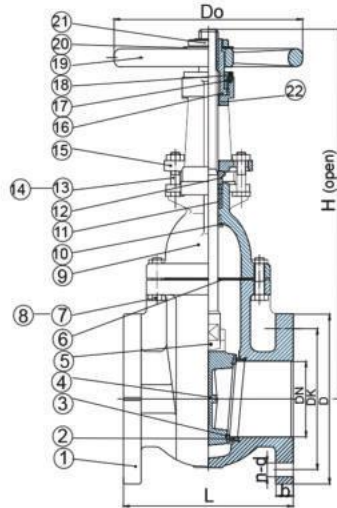

DIMENSIONS IN INCHES AND MILLIMETRES

DN	L	Dk	D	b	n-d	Do	H
2"	178	121	152	15.9	4-19	178	380
2.5"	190.5	140	178	17.5	4-19	178	430
3"	203.2	152.5	190	19.1	4-19	200	485
4"	228.6	190.5	228.6	23.5	8-19	254	615
5"	254	215.9	254	23.8	8-22	300	700
6"	266.7	241.3	279.4	25.4	8-22	300	835
8"	292	298.5	343	28.6	8-22	348	1010
10"	330	362	406	30.2	12-25	400	1220
12"	356	432	483	31.8	12-25	457	1435
14"	381	476	533	35	12-29	508	1655
16"	406	540	597	36.6	16-29	558	1825
18"	432	578	635	39.7	16-32	610	2020
20"	457	635	699	42.9	20-32	640	2290
24"	508	749	813	47.6	20-35	762	3360
30"	610	914	984	54	28-35	813	3665
36"	711	1086	1168	60.3	32-42	813	3920

NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	ASTM A126 CLASS B
2	Seat Rings	Cast Bronze	ASTM B62
3	Wedge Face Rings	Cast Bronze	ASTM B62
4	Wedge	Cast Iron	ASTM A126 CLASS B
5	Stem	Brass	ASTM B16
6	Body Gasket	Graphite	NON ASBESTOS
7	Bolts	Steel	ASTM A307 B
8	Nuts	Steel	ASTM A307 B
9	Bonnet	Cast Iron	ASTM A126 CLASS B
10	Back Seat Bushing	Cast Brass	ASTM B584
11	Packing	Graphite	NON ASBESTOS
12	Packing Gland	Cast Brass	ASTM B584
13	Gland Follower Bolts	Steel	ASTM A307 B
14	Gland Follower Nuts	Steel	ASTM A307 B
15	Gland Follower	Ductile Iron	ASTM A536 65-45-12
16	Yoke Bushing	Cast Bronze	ASTM B62
17	Yoke Bushing Nut	Cast Iron	ASTM A126 CLASS B
18	Screw	Steel	ASTM A307 B
19	Handwheel	Cast Iron	ASTM A126 CLASS B
20	Identification Plate	Aluminium	
21	Handwheel Nut	Ductile Iron	ASTM A536 65-45-12
22	Yoke	Cast Iron	ASTM A126 CLASS B



- Conforms to MSS SP-70
- Flanges drilled to ANSI B16.1(125LB)
- Face to Face dimensions conform to ANSI B16.10(125LB)
- Working pressure: 125S, 200WOG. With MSS SP-70
- Suitable media: water, oil, gas
- Construction available in all iron.
- Yoke construction for sizes 50, 65 & 80 have 1 piece bonnet/yoke.






- Conforms to BS5150 PN16 & BS5163
- Flanges drilled to BS4504
- Face to Face dimensions conform to BS5150 Series 3.
- Nominal pressure: 1.6Mpa
- Seat Test pressure: 1.6Mpa
- Shell Test pressure: 2.4Mpa
- Suitable temperature $\leq 230^{\circ}\text{C}$
- Suitable media: water, oil, gas



J480 BS5150 / BS5156

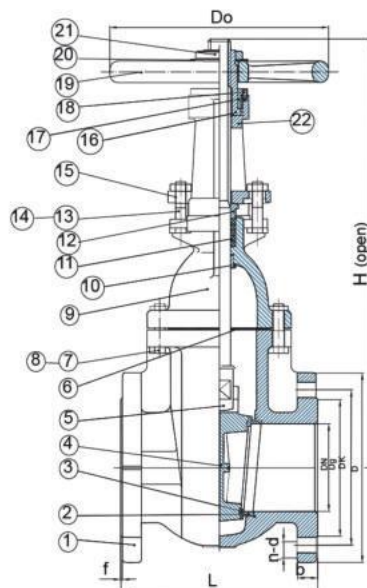


DIMENSIONS-INCHES AND MILLIMETRES

VALVE SIZE	DIM.								
	L	Dg	Dk	D	b	f	n-d	Do	H
50	178	102	125	165	20	2	4-19	178	380
65	190.5	122	145	185	20	2	4-19	178	430
80	203.2	138	160	200	22	2	8-19	200	485
100	228.6	158	180	220	24	2	8-19	254	615
125	254	188	210	250	26	2.5	8-19	300	700
150	266.7	212	240	285	26	2.5	8-23	300	835
200	292	268	295	340		2.5	12-23	348	1010
250	330	320	355	405	32	2.5	12-28	400	1220
300	356	378	410	460	32	2.5	12-28	457	1435
350	381	438	470	520	36	3	16-28	508	1655
400	406	490	525	580	38	3	16-31	558	1825
450	432	550	585	640	40	3	20-31	610	2020
500	457	610	650	715	42	3	20-34	640	2290
600	508	725	770	840	48	3.5	20-37	762	3665

NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	BS1452 Cr.180
2	Seat Rings	Cast Bronze	BS1400 LG2
3	Wedge Face Rings	Cast Bronze	BS1400 LG2
4	Wedge	Cast Iron	BS1452 Cr.180
5	Stem	Brass	BS2874 CZ122
6	Body Gasket	Graphite	BS2494 Type W
7	Bolts	Steel	BS970 43A
8	Nuts	Steel	BS970 43A
9	Bonnet	Cast Iron	BS1452 Cr.180
10	Back Seat Bushing	Cast Brass	BS1400 PCB1
11	Packing	Graphite	BS2494 Type W
12	Packing Gland	Cast Brass	BS1400 PCB1
13	Gland Follower Bolts	Steel	BS970 43A
14	Gland Follower Nuts	Steel	BS970 43A
15	Gland Follower	Ductile Iron	BS2789 Gr.420-12
16	Yoke Bushing	Cast Bronze	BS1400 LG2
17	Yoke Bushing Nut	Cast Iron	BS1452 Cr.180
18	Screw	Steel	BS970 43A
19	Handwheel	Cast Iron	BS1452 Cr.180
20	Identification Plate	Aluminium	
21	Handwheel Nut	Ductile Iron	BS2789 Gr.420-12
22	Yoke	Cast Iron	BS1452 Cr.180

GATE VALVE

J410 RISING STEAM RESILIENT SEATED GATE VALVE (ANSI B16.10)

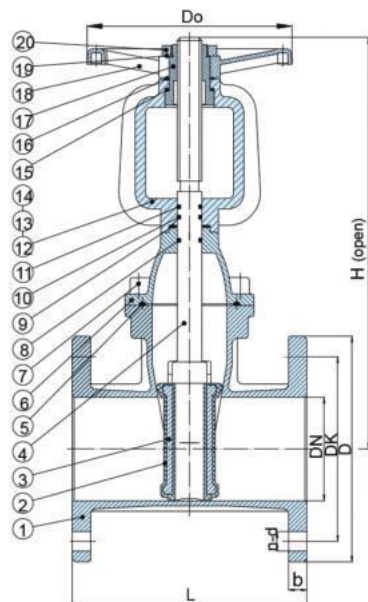

DN	L	DK	D	b	n-d	Do	H
2"	178	120.5	152	15.9	4-19	160	380
2-1/2"	190	139.5	178	17.5	4-19	200	430
3"	203	152.5	191	19.1	4-19	200	485
4"	229	190.5	229	23.9	8-19	200	615
5"	254	216	254	23.9	8-22	250	700
6"	267	241.5	279	25.4	8-22	250	835
8"	292	298.5	343	28.6	8-22	320	1010
10"	330	362	406	30.2	12-25	370	1220
12"	356	432	483	31.8	12-25	370	1435
14"	381	476	533	35	12-29	450	1655
16"	406	539.5	597	36.6	16-29	450	1825
18"	432	578	635	39.7	16-32	640	2020
20"	457	635	699	42.9	20-32	640	2290
24"	508	749.5	813	47.7	20-35	640	3665

NO.	PART	MATERIAL	STANDARD
1	Body	Ductile Iron	ASTM A536 65-45-12
2	Resilient wedge	Ductile Iron +EPDM	ASTM A536 65-45-12+EPDM
3	Wedge skeleton	Ductile Iron	ASTM A536 65-45-12
4	Stem	Stainless Steel	SS410
5	Gasket	EPDM	EPDM
6	Bonnte	Ductile Iron	ASTM A536 65-45-12
7	Bolts	Steel	ASTM A307 B
8	O-Ring	EPDM	EPDM
9	Gasket	PTFE	PTFE
10	O-Ring	EPDM	EPDM
11	O-Ring	EPDM	EPDM
12	Yoke	Ductile Iron	ASTM A536 65-45-12
13	Bolts	Steel	ASTM A307 B
14	Nuts	Steel	ASTM A307 B
15	Gasket	PTFE	PTFE
16	Gasket	PTFE	PTFE
17	Yoke Bushing	Brass	ASTM B16
18	Handwheel	Ductile Iron	ASTM A536 65-45-12
19	Identification plate	Aluminium	Aluminium
20	Handwheel Nut	Brass	ASTM B16




- Conform to AWWA C509
- Face to Face dimension conforms to
- ANSI16.10(125LB)
- Flanges drilled conforms to
- ANSI16.10(125LB)
- Suitable media:water



J412 RISING STEAM RESILIENT SEATED GATE VALVE (BS5163)



- Conforms to BS5163&BS5150
- Face to face dimensions conforms to BS5163
- Flanges drilled conforms to BS4504&EN1092
- Suitable media: water
- Suitable temperature < 100°C
- Nominal pressure: 1.6Mpa
- Seat Test pressure: 1.6Mpa
- Shell Test pressure: 2.4Mpa

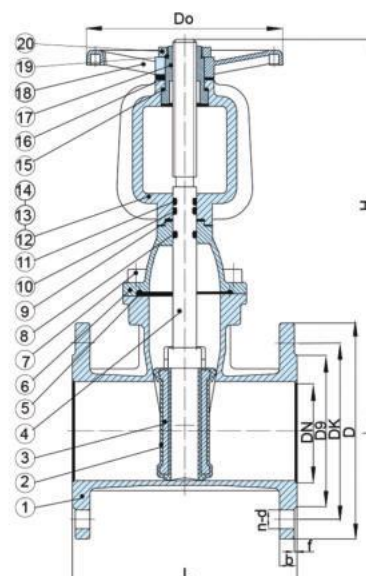


NO.	PART	MATERIAL	STANDARD
1	Body	Ductile Iron	BS2789 Gr450/10
2	Resilient wedge	Ductile Iron +EPDM	BS2789 Gr450/10+EPDM
3	Wedge skeleton	Ductile Iron	BS2789 Gr450/10
4	Stem	Stainless Steel	BS410 S21
5	Gasket	EPDM	EPDM
6	Bonnte	Ductile Iron	BS2789 Gr450/10
7	Bolts	Steel	BS970 43A
8	O-Ring	EPDM	EPDM
9	Gasket	PTFE	PTFE
10	O-Ring	EPDM	EPDM
11	O-Ring	EPDM	EPDM
12	Yoke	Ductile Iron	BS2789 Gr450/10
13	Bolts	Steel	BS970 43A
14	Nuts	Steel	BS970 43A
15	Gasket	PTFE	PTFE
16	Gasket	PTFE	PTFE
17	Yoke Bushing	Brass	BS1400 LG2
18	Handwheel	Ductile Iron	BS2789 Gr450/10
19	Identification plate	Aluminium	Aluminium
20	Handwheel Nut	Brass	BS1400 LG2



DN	L	Dg		DK		D		f	b		n-d		Do	H
		1.0MPa	1.6MPa	1.0MPa	1.6MPa	1.0MPa	1.6MPa		1.0MPa	1.6MPa	1.0MPa	1.6MPa		
50	178	99		125		165		3	19		4-19		160	410
65	190	118		145		185		3	19		4-19		200	487
80	203	132		160		200		3	19		8-19		200	538
100	229	156		180		220		3	19		8-19		200	620
125	254	184		210		250		3	19		8-19		250	673
150	267	211		240		285		3	19		8-23		250	726
200	292	265		295		340		3	20		8-23	12-23	320	867
250	330	319	350	355		400		3	22		12-23	12-28	370	1042
300	356	370	400	410		455		4	24.5		12-23	12-28	370	1297
350	381	429	460	470		520		4	24.5	26.5	16-23	12-29	450	1453
400	406	480	515	525		580		4	24.5	28	16-28	16-28	450	1692
450	432	530	548	565	585	615	640	4	25.5	30	20-28	16-31	640	1852
500	457	582	609	620	650	670	715	4	26.5	31.5	20-28	20-34	640	2023
600	508	682	720	725	770	780	840	5	30	36	20-31	20-37	640	2412

GATE VALVE

J414 RISING STEAM RESILIENT SEATED GATE VALVE (DIN 3202-F4/F5)

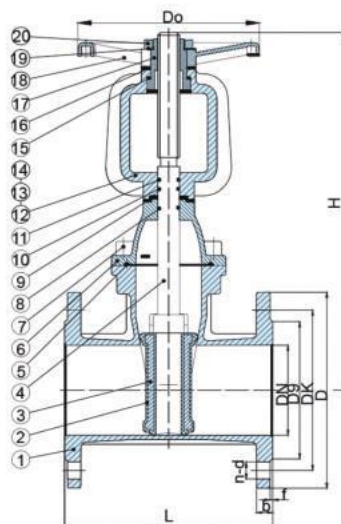

NO.	PART	MATERIAL	STANDARD
1	Body	Ductile Iron	GGG50
2	Resilient wedge	Ductile Iron +EPDM	GGG50+EPDM
3	Wedge skeleton	Ductile Iron	GGG50
4	Stem	Stainless Steel	SS410
5	Gasket	EPDM	EPDM
6	Bonnet	Ductile Iron	GGG50
7	Bolt	Steel	SS304
8	O-Ring	EPDM	EPDM
9	Gasket	PTFE	PTFE
10	O-Ring	EPDM	EPDM
11	O-Ring	EPDM	EPDM
12	Yoke	Ductile Iron	GGG50
13	Bolt	Steel	SS304
14	Nuts	Steel	SS304
15	Gasket	PTFE	PTFE
16	Gasket	PTFE	PTFE
17	Yoke Bushing	Brass	CuZn39Pb
18	Handwheel	Ductile Iron	BS2789 Gr450/10
19	Identification plate	Aluminium	GGG50
20	Handwheel Nut	Brass	CuZn39Pb

DN	L		Dg		DK		D		f	b		n-d		Do	H
	F4	F5	10MPa	16MPa	10MPa	16MPa	10MPa	16MPa		10MPa	16MPa	10MPa	16MPa		
40	140	240	84		110		150		3	18		4-19		160	360
50	150	250	99		125		165		3	19		4-19		160	410
65	170	270	118		145		185		3	19		4-19		200	487
80	180	280	132		160		200		3	19		8-19		200	538
100	190	300	156		180		220		3	19		8-19		200	620
125	200	325	184		210		250		3	19		8-19		250	673
150	210	350	211		240		285		3	19		8-23		250	726
200	230	400	265		295		340		3	20		8-23	12-23	320	867
250	250	450	319		350	355	400		3	22		12-23	12-28	370	1042
300	270	500	370		400	410	455		4	24.5		12-23	12-28	370	1297
350	290	550	429		460	470	520		4	24.5	26.5	16-23	12-29	450	1453
400	310	600	480		515	525	565		4	24.5	28	12-27	16-28	450	1296
450	330	650	530	548	565	585	615	640	4	25.5	30	16-27	16-31	640	1675
500	350	700	582	609	620	650	670	715	4	26.5	31.5	20-28	20-34	640	2023
600	390	800	682	720	725	770	780	840	5	30	36	20-31	20-37	640	2412



- Conforms to DIN3352
- Flanges drilled to DIN2533 & EN1092
- Face to Face dimensions
- Conform to DIN3202 F4/F5
- Suitable media: water
- Suitable temperatures ≤ 100 °C
- Nominal pressure: 1.6Mpa
- Seat Test pressure: 1.6Mpa
- Shell Test pressure: 2.4Mpa




J416 NON-RISING STEAM GATE VALVE WITH CHANGEABLE O-RING (BS5163)



- Inside Screw
- Bolt Bonnet
- Non-Rising Stem
- Rubber Encapsulated Wedge
- Low-Torque Operation
- Flanged Ends

BASIC DESIGN STANDARDS	
BASIC DESIGN	BS5163
FACE TO FACE	BS5163
FLANGES	BS4504 PN16
TESTING	BS6755

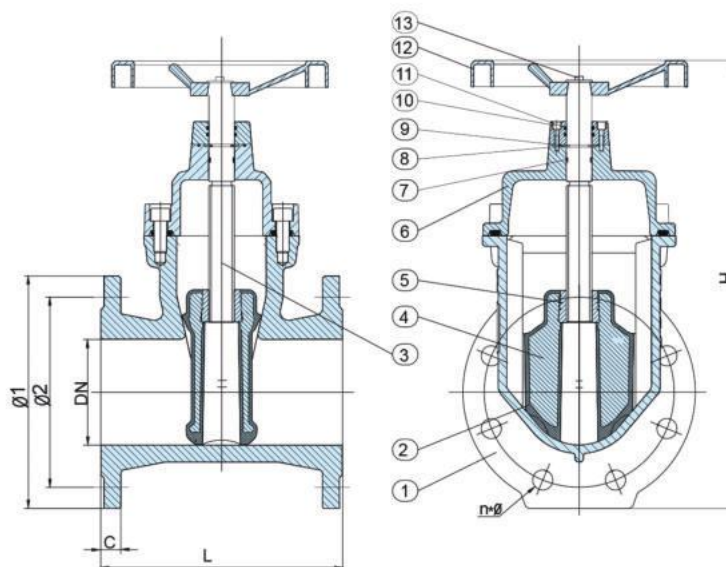

TECHNICAL DATA

NOMINAL DIAMETER		DN40-DN500	mm
NOMINAL PRESSURE		1.6	
TESTING PRESSURE	SHELL TEST	2.4	Mpa
	SEALING TEST	1.76	


STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Ductile Iron
2	Seat	EPDM
3	Shaft	Stainless Steel 420
4	Disc	Ductile Iron
5	Wedge Nut	Brass
6	Bonnet	Ductile Iron
7	O ring	EPDM
8	Thrust Washer	Brass
9	Sealing ring	EPDM
10	socket head screw	Carbon Steel
11	Oring	EPDM
12	Hand Wheel	Ductile Iron
13	Stem Nut	Brass

SIZE	DN	L	H	BS4504 PN10/16			C
				Φ1	Φ2	N*Φ	
DN40	Φ40	165	285	Φ150	Φ110	4-Φ18	17
DN50	Φ50	178	300	Φ165	Φ125	4-Φ18	18
DN65	Φ65	190	345	Φ185	Φ145	4-Φ18	18
DN80	Φ80	203	390	Φ200	Φ160	4/8-Φ18	18
DN100	Φ100	229	430	Φ220	Φ180	8-Φ18	19
DN125	Φ125	254	510	Φ250	Φ210	8-Φ18	19
DN150	Φ150	267	565	Φ285	Φ240	8-Φ22	19
DN200	Φ200	292	680	Φ340	Φ295	8/12-Φ22	22
DN250	Φ250	330	820	Φ395/Φ405	Φ350/Φ355	12-Φ23/Φ26	22
DN300	Φ300	356	930	Φ445/Φ460	Φ400/Φ410	12-Φ23/Φ26	26
DN350	Φ350	381	1020	Φ505/Φ520	Φ460/Φ470	16-Φ23/Φ26	30
DN400	Φ400	406	1100	Φ565/Φ580	Φ515/Φ525	16-Φ26/Φ30	30
DN500	Φ500	457	1250	Φ670/Φ715	Φ620/Φ650	20-Φ26/Φ33	32

GATE VALVE

J418 NON-RIISING STEAM RESILIENT SEATED GATE VALVE WITH CHANGEABLE O-RING (DIN 3202-F4/F5)

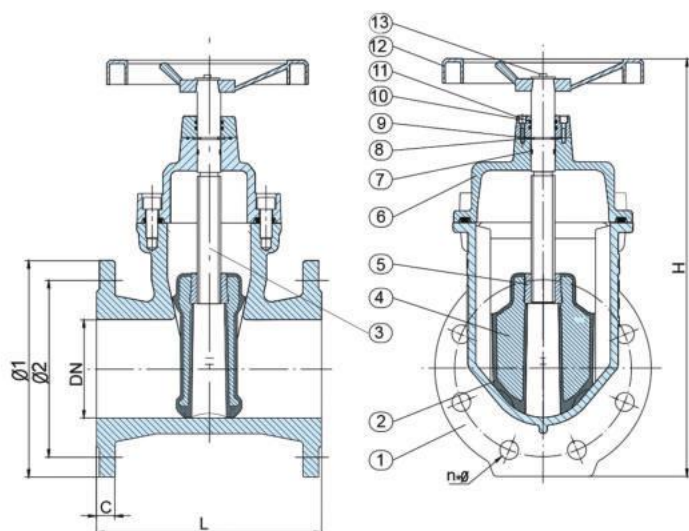

TECHNICAL DATA

NOMINAL DIAMETER		DN40-DN500	mm
NOMINAL PRESSURE		1.6	
TESTING PRESSURE	SHELL TEST	2.4	Mpa
	SEALING TEST	1.76	

STANDARD MATERIALS OF MAIN PARTS

NO.	PART	MATERIAL
1	Body	Ductile Iron
2	Seat	EPDM
3	Shaft	Stainless Steel 420
4	Disc	Ductile Iron
5	Wedge Nut	Brass
6	Bonnet	Ductile Iron
7	O ring	EPDM
8	Thrust Washer	Brass
9	Sealing ring	EPDM
10	socket head screw	Carbon Steel
11	Oring	EPDM
12	Hand Wheel	Ductile Iron
13	Stem Nut	Brass

SIZE	DN	L		H	DIN PN10/16			C
		F4	F5		Φ1	Φ2	N*Φ	
DN40	Φ40	140	240	285	Φ150	Φ110	4-Φ18	17
DN50	Φ50	150	250	300	Φ165	Φ125	4-Φ18	18
DN65	Φ65	170	270	345	Φ185	Φ145	4-Φ18	18
DN80	Φ80	180	280	390	Φ200	Φ160	4/8-Φ18	18
DN100	Φ100	190	300	430	Φ220	Φ180	8-Φ18	19
DN125	Φ125	200	325	510	Φ250	Φ210	8-Φ18	19
DN150	Φ150	210	350	565	Φ285	Φ240	8-Φ22	19
DN200	Φ200	230	400	680	Φ340	Φ295	8/12-Φ22	22
DN250	Φ250	250	450	820	Φ395/Φ405	Φ350/Φ355	12-Φ23/Φ26	22
DN300	Φ300	270	500	930	Φ445/Φ460	Φ400/Φ410	12-Φ23/Φ26	26
DN350	Φ350	290	550	1020	Φ505/Φ520	Φ460/Φ470	16-Φ23/Φ26	30
DN400	Φ400	310	600	1100	Φ565/Φ580	Φ515/Φ525	16-Φ26/Φ30	30
DN500	Φ500	350	700	1250	Φ670/Φ715	Φ620/Φ650	20-Φ26/Φ33	32



- Inside Screw
- Bolt Bonnet
- Non-Rising Stem
- Rubber Encapsulated Wedge
- Low-Torque Operation
- Flanged Ends

BASIC DESIGN STANDARDS	
BASIC DESIGN	DIN3352
FACE TO FACE	DIN3202-F4/F5
FLANGES	DIN2533 PN16
TESTING	DIN3230



• CHECK VALVE



- 1. Small in size, light in weight, compact in structure, easy in maintenance.
- 2. Two torsion springs are used excreting on each of the pair valve plates, which close the plates quickly and automatically.
- 3. The quick-close action prevents the medium from flowing back and eliminates water hammer effect.
- 4. Short body structure length and good rigidity.
- 5. This valve is tightly sealed, without leakage under the pressure water test.
- 6. Safe and reliable in operation, high interference-resistance.



Note: The stem of the valve should be perpendicular to the horizontal level when the valve is mounted on horizontal pipeline. For vertical installation the direction of flow should be downward.

CHECK VALVE

Through precise manufacture, the main parts of check butterfly valve ensure valve's operation in a long stable and reliable and reliable condition.

Body

Short body structure length and good rigidity.

Disc

Adopting unitized design of dual discs and two torsion springs, it can make disc quickly closed itself and remove water-hammer

Rubber seat

It will be cured on body, tight fit and tight seal with no leakage.

Spring


It is possible to install valve on any positing of pipeline under the function of spring with low cost.


Gasket

It effectively prevents rotating shaft moving and avoid failure of valve function and leakage on shaft end.

Fasten screw

It is possible to regulate fitting clearance using washer and ensure the sealing of disc.

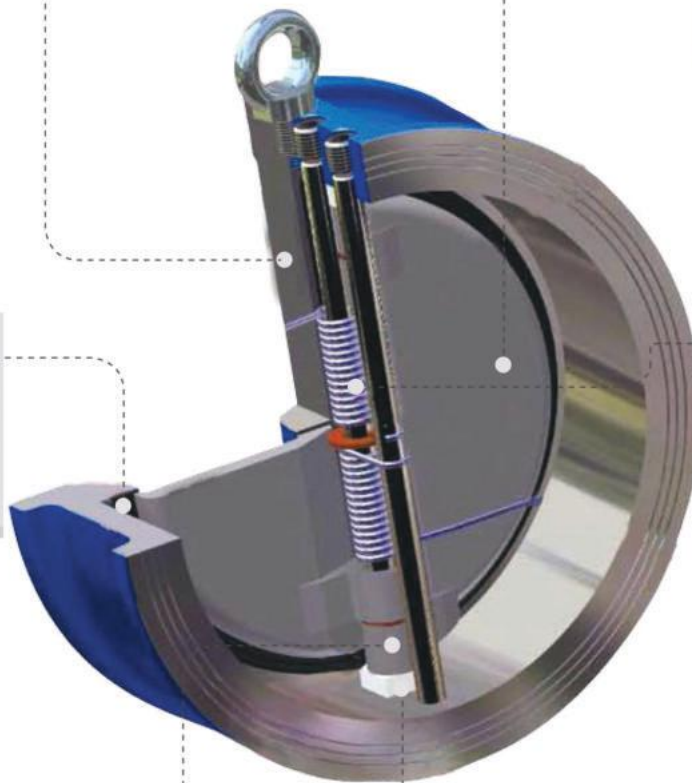


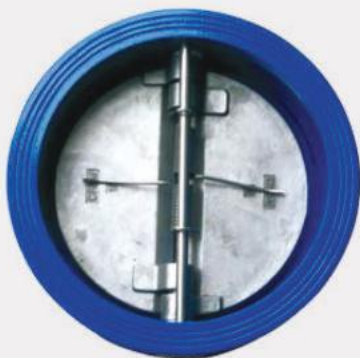

- Suitable media: water, sewage, sea water, air, foodstuff, oil etc.
- Working Temperature: -10°C~120°C



J505 DUAL PLATE WAFER CHECK VALVE

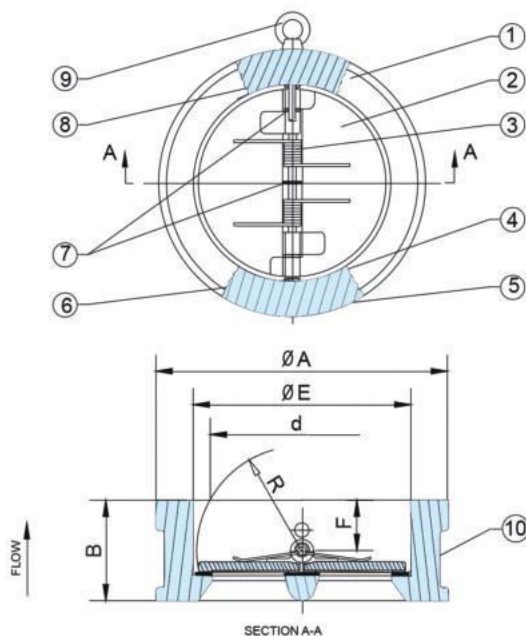

STANDARD MATERIALS OF PARTS


NO.	PART	MATERIAL
1	Body	Cast Iron, Ductile Iron
2	Plate	Ductile Iron+Ni, CF8, CF8M, Bronze
3	Spring	Stainless Steel
4	Hinge Pin	Stainless Steel
5	Plug	Carbon Steel
6	Body Bearing	PTFE
7	Spring Bearing	PTFE
8	Stop Pin	Stainless Steel
9	Eye Bolt	Carbon Steel
10	Body Seat	NBR, EPDM, Viton, Neoprene

DIMENSIONS

SIZE		B	E	F	R	d	A	
in	DN						DIN PN10/16	ANSI150
2	50	43	65	19	28.8	43.3	107	102
2-1/2	65	46	80	20	36.1	60.2	127	121
3	80	64	94	28	43.4	66.4	142	133
4	100	64	117	27	52.8	90.8	162	171
5	125	70	145	30	65.7	116.9	192	193
6	150	76	170	30	78.6	144.6	218	219
8	200	89	224	31	104.4	198.2	273	276
10	250	114	265	33	127	233.7	328	336
12	300	114	310	50	148.3	283.9	378/382	406
14	350	127	360	43	172.4	332.9	438/442	448
16	400	140	410	45	197.4	381	488/495	511
18	450	152	450	52	217.8	419.9	538/555	546
20	500	152	505	58	241	467.8	592/617	603
24	600	178	624	73	295.4	572.6	695/734	714
28	700	229	720	98	354	680	809	828
32	800	241	825	100	398	770.5	916	936

CHECK VALVE

J502 SWING CHECK VALVE (ANSI B16.10)

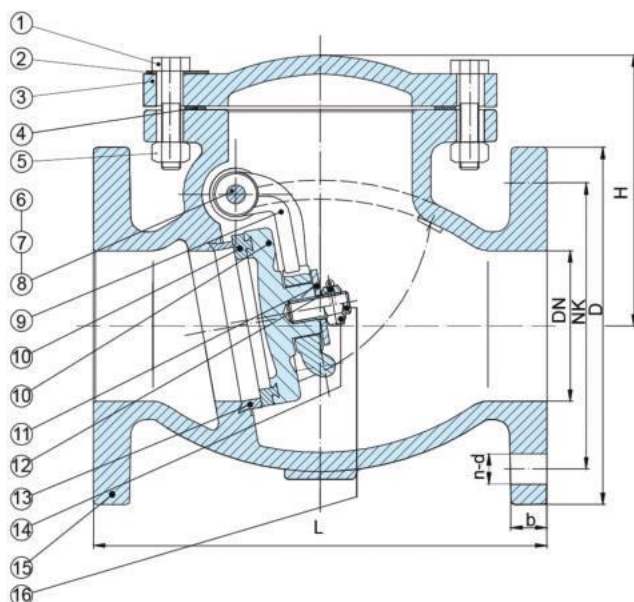

DIMENSIONS IN INCHES AND MILLIMETRES

DN	2"	2.5"	3"	4"	5"	6"	8"	10"	12"	14"	16"
L	203.2	215.9	241.3	292	330.2	355.6	495	622	698.5	787	914
DK	121	140	152.5	190.5	215.9	241	298.5	362	432	476	540
D	152	178	190	228.6	254	279.4	343	406.4	483	533	597
b	15.9	17.5	19	24	23.4	25.4	30	31	31.8	35	36.6
n-d	4-19	4-19	4-19	8-19	8-22	8-22	8-22	12-25	12-25	12-29	16-29
H	113	133	144	168	198	217	261	287	319	443	595.5

NO.	PART	MATERIAL	STANDARD
1	Bolts	Steel	ASTM A307 B
2	Identification Plate	Aluminium	
3	Bonnet	Cast Iron	ASTM A126 CLASS B
4	Body Gasket	Graphite	NON ASBESTOS
5	Nuts	Steel	ASTM A307 B
6	Side Plug	Brass	ASTM B16
7	Gasket	Fiber	
8	Hanger Pin	Brass	ASTM B16
9	Hanger	Ductile Iron	ASTM A536 65-45-12
10	Disc Ring	Cast Bronze	ASTM B62
10'	Disc	Cast Iron	ASTM A126 CLASS B
11	Washer	Steel	ASTM A307 B
12	Split Pin	Stainless Steel	ASTM 420 S42000
13	Seat Ring	Cast Bronze	ASTM B62
14	Disc Nut	Steel	ASTM A307 B
15	Body	Cast Iron	ASTM A126 CLASS B
16	Stud Bolt	Steel	ASTM A307 B



DESCRIPTION:

- 1.Conforms to MSS SP-71.
- 2.Flange drilled to ANSI B16.1(125lb).
- 3.Face to Face Dimension Conform to ANSI B16.10 (125lb).
- 4.Working Pressure: 125LB
- 5.Suitable Media: Water, Oil, Gas.
- 6.Only Valve Sizes: 350& above fitted UFTING EYE BOLT.






DESCRIPTION:

- 1.Conform to BS5153 PN16.
- 2.Flange Drilled Conforms to BS4504
- 3.Face to Face Dimensions Conform to Series 2 of BS 5153.



J555 SWING CHECK VALVE (BS5153)

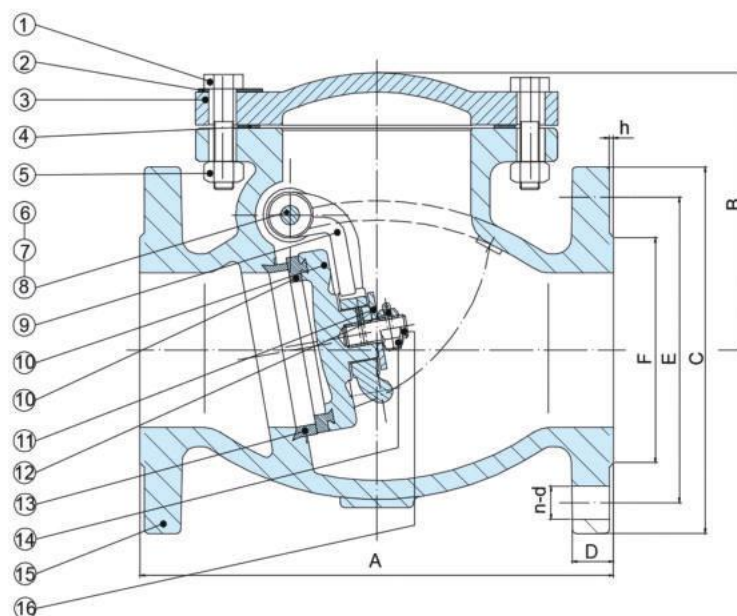


DIMENSIONS-MILLIMETRES

DIM.	VALVE SIZE								
	50	65	80	100	125	150	200	250	300
A	203	216	241	292	330	356	495	622	698
B	113	133	142	163	197	212	257	299	331
C	165	185	200	220	250	285	340	405	450
D	20	20	20	24	26	26	30	32	32
E	125	145	160	180	210	240	295	355	410
F	102	122	138	158	188	212	268	320	378
n-d	4-19	4-19	4-19	8-19	8-19	8-23	12-23	12-28	12-28
h	2	2	2	2	2.5	2.5	2.5	2.5	2.5

NO.	PART	MATERIAL	STANDARD
1	Bolts	Steel	BS970 43A
2	Identification Plate	Aluminium	
3	Bonnet	Cast Iron	BS1452 Cr.180
4	Body Gasket	Graphite	BS2494 Type W
5	Stem	Brass	BS2874 CZ12
6	Nuts	Steel	BS970 43A
7	Side Plug	Brass	BS2874 CZ12
8	Gasket	Fiber	
9	Hanger Pin	Brass	BS2874 CZ12
10	Hanger	Ductile Iron	BS2789 Gr.420-12
11	Disc	Cast Iron	BS1452 Cr.180
12	Disc Ring	Cast Bronze	BS1400 LG2
13	Washer	Steel	BS970 43A
14	Split Pin	Stainless Steel	BS970 420S37
15	Body	Cast Iron	BS1452 Cr.180
16	Stud Bolt	Steel	BS970 43A

CHECK VALVE

J504 SWING CHECK VALVE (DIN 3202 F6)

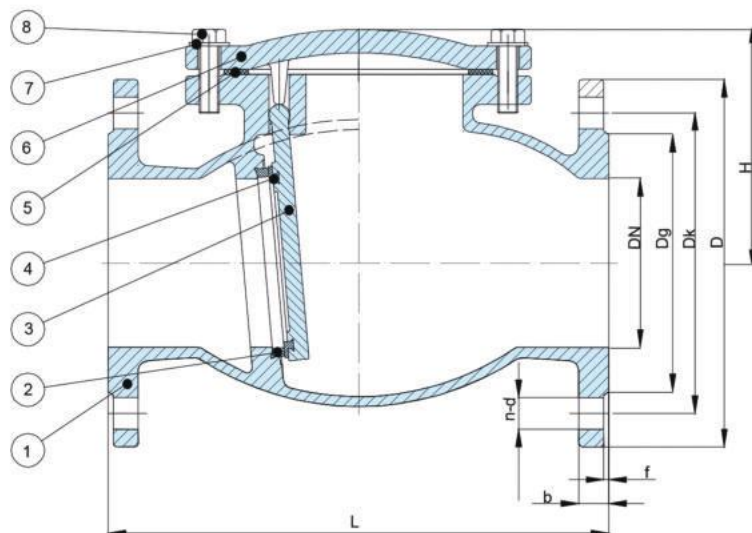

- 1. Conform to DIN 3202.
- 2. Flanges Drilled to DIN2533&EN1092.
- 3. Face to Face Dimensions Conform to DIN 3202 F6.
- 4. Suitable Media: Water.
- 5. Suitable Temperature: $\leq 100^{\circ}\text{C}$.
- 6. Nominal Pressure: 1.0MPa/1.6MPa.

DN	L	Dg		Dk		D		f	b		n-d		H
		1.0MPa	1.6MPa	1.0MPa	1.6MPa	1.0MPa	1.6MPa		1.0MPa	1.6MPa	1.0MPa	1.6MPa	
50	200	99		125		165		3	19		4-19		125
65	240	118		145		185		3	19		4-19		130
80	260	132		160		200		3	19		8-19		160
100	300	156		180		220		3	19		8-19		185
125	350	184		210		250		3	19		8-19		195
150	400	211		240		285		3	19		8-23		205
200	500	265		295		340		3	20		8-23	12-23	285
250	600	319		350	355	405		3	22		12-23	12-28	320
300	700	370		400	410	460		4	24.5		12-23	12-28	340


NO.	PART	MATERIAL	STANDERD
1	Body	Cast Iron	GG25
2	Seat Ring	Cast Bronze	G-CuSn5ZnPb
3	Disc	Cast Iron	GG25
4	Disc Ring	Cast Bronze	G-CuSn5ZnPb
5	Body Gasket	EPDM	EPDM
6	Bonnet	Cast Iron	GG25
7	Identification Plate	Aluminium	
8	Bolts	Steel	A307B





- Available Medium: Water
- Working Temperature: ≤50°C
- Flange Dimensions: DIN2501-PN10

J506 CAST IRON SILENT CHECK VALVE PN16

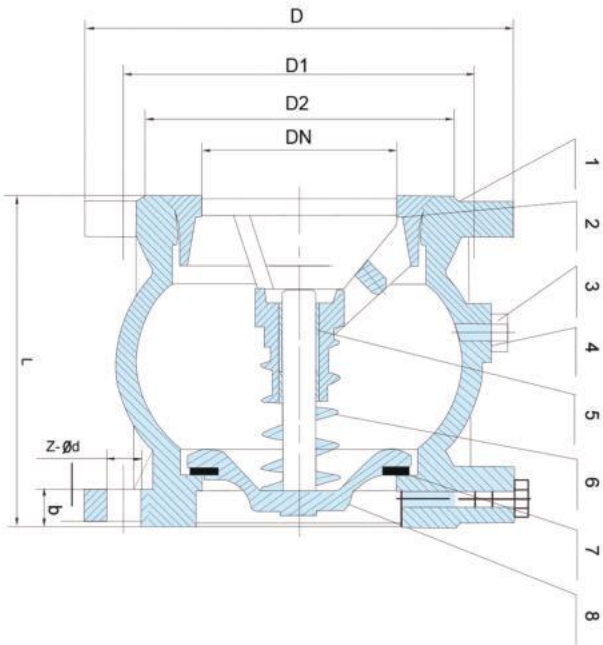

MATERIALS

ITEM	PARTS NAME	MATERIAL
1	Body	Cast Iron
2	Guide Pulley	GGG40
3	Plug	Brass
4	"O"Ring	Rubber
5	Guide Sleeve	Brass
6	Spring	Stainless Steel
7	Gasket	Rubber
8	Disc	GGG40


DIMENSIONS(mm)

DN	L	D	D1	D2	b	Z-φd	f	KG
50	100	165	125	102	20	4-18	3	5.6
65	120	185	145	122	20	4-18	3	8.96
80	140	200	160	138	22	8-18	3	12.26
100	170	220	180	158	24	8-18	3	14.8
125	200	250	210	188	26	8-18	3	23.3
150	230	285	240	212	26	8-23	3	31.2
200	288	340	295	268	30	12-23	3	
250	354	405	355	320	32	12-27	3	
300	410	460	410	378	32	12-27	4	



GLOBE VALVE

J602 GLOBE VALVE (ANSI B16.10)

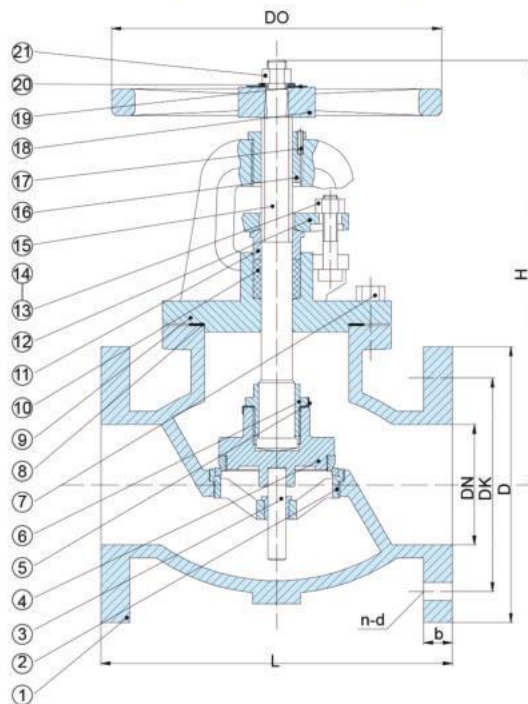

NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	ASTM A126 CLASS B
2	Seat Ring	Cast Bronze	ASTM B62
3	Reaction Member	Brass	ASTM B16
4	Disc	Cast Bronze	ASTM B62
5	Gasket	Brass	ASTM B16
6	Swivel Nut	Cast Brass	ASTM B584
7	Bolts	Steel	ASTM A307 B
8	Body Gasket	Graphite	NON ASBESTOS
9	Bonnet	Cast Iron	ASTM A126 CLASS B
10	Packing	Graphite	NON ASBESTOS
11	Packing Gland	Cast Brass	ASTM B584
12	Gland Follower	Ductile Iron	ASTM A536 65-45-12
13	Gland Follower Bolts	Steel	ASTM A307 B
14	Gland Follower Nuts	Steel	ASTM A307 B
15	Stem	Brass	ASTM B16
16	Yoke Bushing	Cast Bronze	ASTM B62
17	Screw	Steel	ASTM A307 B
18	Handwheel	Cast Iron	ASTM A126 CLASS B
19	Identification Plate	Aluminium	
20	Washer	Steel	ASTM A307 B
21	Handwheel Nut	Ductile Iron	ASTM A536 65-45-12

DIMENSIONS IN INCHES AND MILLIMETRES

DIM.	VALVE SIZE									
	50	65	80	100	125	150	200	250	300	
L	203	216	241.3	292	330	356	495.3	622	698.5	
Dk	121	140	152.5	190.5	216	241	299	362	432	
D	152	178	191	229	254	279.4	343	406	483	
b	15.9	18	19	24	23.8	25	28.6	30.2	31.8	
n-d	4-19	4-19	4-19	8-19	8-22	8-22	8-22	12-25	12-25	
DO	178	178	200	254	300	300	348	400	457	
H	295	330	365	400	450	525	595	685	830	



Usage:

Turn on or turn off the pipelines where the working nominal pressure is $\leq 1.6\text{MPa}$.






• Usage:

Turn on or turn off the pipelines where the working nominal pressure is $\leq 1.6\text{MPa}$.



J666 GLOBE VALVE (BS5152)

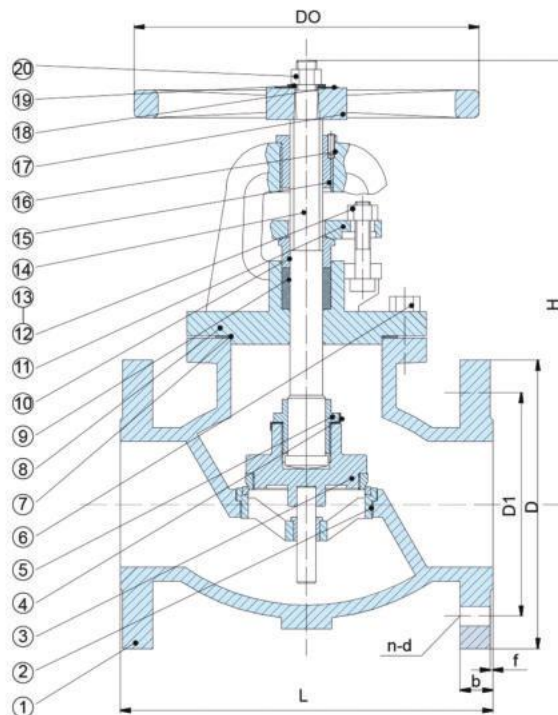


NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	BS1452 Cr.180
2	Seat Ring	Cast Bronze	BS1400 LG2
3	Disc	Cast Bronze	BS1400 LG2
4	Gasket	Brass	BS2874 CZ122
5	Swivel Nut	Cast Brass	BS1400 PCB1
6	Bolts	Steel	BS970 43A
7	Body Gasket	Graphite	BS2494 Type W
8	Bonnet	Cast Iron	BS1452 Cr.180
9	Packing	Graphite	BS2494 Type W
10	Packing Gland	Cast Brass	BS1400 PCB1
11	Gland Follower	Ductile Iron	BS2789 Gr.420-12
12	Gland Follower Bolts	Steel	BS970 43A
13	Gland Follower Nuts	Steel	BS970 43A
14	Stem	Brass	BS2874 CZ122
15	Yoke Bushing	Cast Bronze	BS1400 LG2
16	Screw	Steel	BS970 43A
17	Handwheel	Cast Iron	BS1452 Cr.180
18	Identification Plate	Aluminium	
19	Washer	Steel	BS970 43A
20	Handwheel Nut	Steel	BS970 43A

DIM.	VALVE SIZE								
	50	65	80	100	125	150	200	250	300
L	203	216	241	292	330	356	495	622	698
D	165	185	200	220	250	285	340	405	460
D1	125	145	160	180	210	240	295	355	410
b	20	20	22	24	26	26	30	32	32
f	2	2	2	2	2.5	2.5	2.5	2.5	2.5
n-d	4-19	4-19	8-19	8-19	8-19	8-23	12-28	12-28	12-28
DO	178	178	200	254	300	300	348	400	457
H	295	330	365	400	450	525	595	685	830

Y-STRAINER

J777 Y-STRAINER

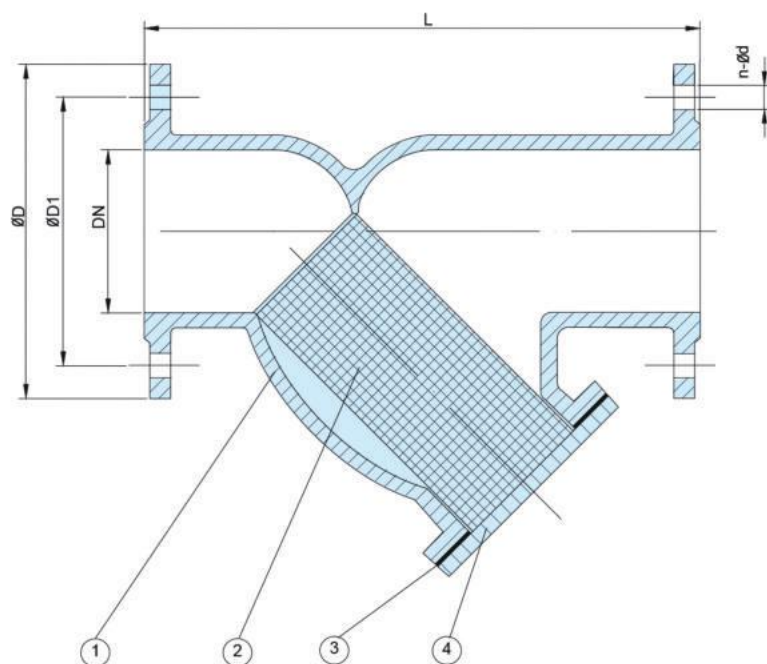

STANDARD MATERIALS OF MAIN PARTS

NO.	PART NAME	MATERIAL
1	Body	Cast Iron
2	Screen	Stainless Steel 304
3	Bonnet	Cast Iron
4	Bolt	Bronze

DIMENSIONS

Nominal DN	$L \pm 0.5$	D	D1	$n-\varnothing d$
50	183	152	120.5	4-19
65	225	178	139.5	4-19
80	250	190.5	152.5	4-19
100	300	229	190.5	8-19
125	325	254	216	8-22
150	355	279	241.5	8-22
200	435	343	298.5	8-22
250	550	406	362	12-25
300	640	483	432	12-25




Nominal Pressure	1.0MPa	1.6MPa
Pressure Test for Sealing	1.1MPa	1.76MPa
Pressure Test for Shell	1.5MPa	2.4MPa
Working Temperature	-10~80℃	
Suitable Medium	Water, Oil, Gas	





J702 Y-STRAINER (DIN 3202 F1)

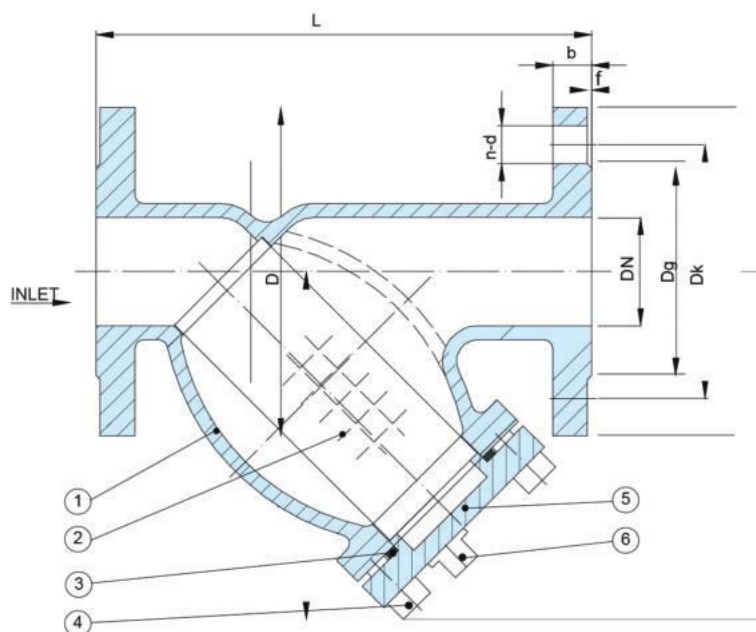

Nominal Pressure	1.0MPa	1.6MPa
Pressure Test for Sealing	1.1MPa	1.76MPa
Pressure Test for Shell	1.5MPa	2.4MPa
Working Temperature	-10~80℃	
Suitable Medium	Water, Oil, Gas	


NO.	PART	MATERIAL	STANDARD
1	Body	Ductile Iron	GGG50
2	Screen	Stainless Steel304/316	DIN SS304/316
3	Body Gasket	Graphite	
4	Bolts	Steel	DIN RRST37-2
5	Cover	Ductile Iron	GGG50
6	Plug	Stainless Steel	DIN SS304

DIMENSIONS IN INCHES AND MILLIMETRES

DN	L	Dg	DK	D	f	b	n-d	H
15	130	46	65	95	2	14	4-14	68
20	150	56	75	105	2	16	4-14	78
25	160	65	85	115	3	16	4-14	88
32	180	76	100	140	3	18	4-19	98
40	200	84	110	150	3	19	4-19	125
50	230	99	125	165	3	19	4-19	153
65	290	118	145	185	3	19	4-19	183
80	310	132	160	200	3	19	8-19	219
100	350	156	180	220	3	19	8-19	238
125	400	184	210	250	3	19	8-19	279
150	480	211	240	285	3	19	8-23	315
200	600	266	295	340	3	20	12-23	400
250	730	319	355	405	3	22	12-28	482
300	850	370	410	460	4	24.5	12-28	565



FLANGE (FOR BUTTERFLY VALVE)

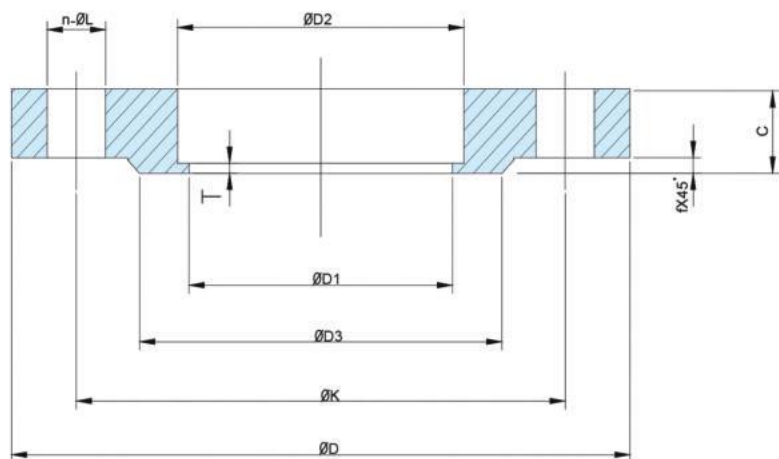

- Nominal Pressure: PN1.0MPa, PN1.6MPa
- Standard: GB/T9119-2000


DIMENSIONS

SIZE	D1	D2	Dk	n-ΦL	T	D3	f	C	D
DN50	50	59	125	4-Φ18	5	102	3	18	165
DN65	65	75	145	4-Φ18	6	122	3	20	185
DN80	80	91	160	8-Φ18	6	133	3	20	200
DN100	100	110	180	8-Φ18	6	158	3	22	220
DN125	125	135	210	8-Φ18	6	184	3	24	250
DN150	150	161	240	8-Φ23	6	212	3	24	285
DN200	208	221	295	8-Φ23	8	268	3	24	340
DN250	255	275	350	12-Φ23	10	320	3	26	395
DN300	308	327	400	12-Φ23	10	370	4	28	445
DN350	340	379	460	16-Φ23	11	430	4	28	505
DN400	405	429	515	16-Φ26	11	482	4	30	565
DN450	455	481	565	20-Φ26	11	532	4	30	615
DN500	505	532	620	20-Φ26	11	585	4	32	670
DN600	605	633	725	20-Φ30	11	685	5	36	780
DN700	705	723	840	24-Φ30	13	800	5	40	895
DN800	810	823	950	24-Φ33	13	905	5	44	1015
DN900	900	923	1050	28-Φ33	13	1005	5	46	1115
DN1000	1000	1023	1160	28-Φ36	13	1110	5	50	1230





FLANGE (FLAT WELDING)

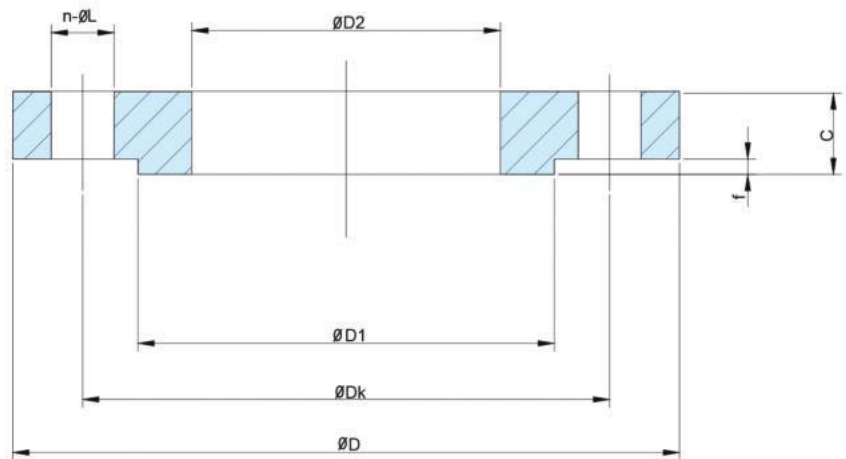


- Nominal Pressure: PN1.0MPa, PN1.6MPa
- Standard: GB/T9119-2000

DIM	D2	Dk	n- $\varnothing L$	D1	f	C	D
SIZE							
DN50	59	125	4- $\varnothing 18$	100	3	18	165
DN65	75	145	4- $\varnothing 18$	120	3	20	185
DN80	91	160	8- $\varnothing 18$	135	3	20	200
DN100	110	180	8- $\varnothing 18$	155	3	22	220
DN125	135	210	8- $\varnothing 18$	185	3	24	250
DN150	161	240	8- $\varnothing 18$	210	3	24	285
DN200	222	295	8- $\varnothing 18$	265	3	24	340
DN250	276	350	12- $\varnothing 23$	320	3	26	395
DN300	328	400	12- $\varnothing 23$	368	4	28	445
DN350	380	460	16- $\varnothing 23$	428	4	28	505
DN400	430	515	16- $\varnothing 26$	482	4	30	565
DN450	484	565	20- $\varnothing 26$	532	4	30	615
DN500	534	620	20- $\varnothing 26$	585	4	32	670
DN600	634	725	20- $\varnothing 30$	685	5	36	780
DN700	723	840	24- $\varnothing 30$	800	5	40	895
DN800	823	950	24- $\varnothing 33$	905	5	44	1015
DN900	923	1050	28- $\varnothing 33$	1005	5	46	1115
DN1000	1023	1160	28- $\varnothing 36$	1110	5	50	1230



SPHERE CONNECTOR

J112 SINGLE SPHERE CONNECTOR WITH FLANGE

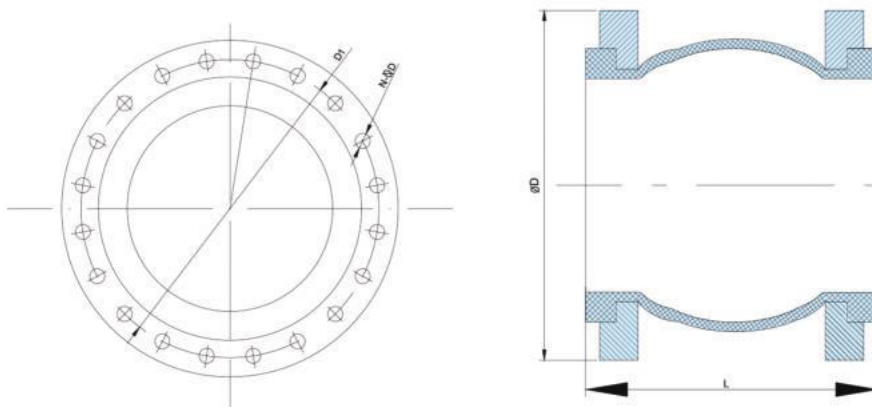

SIZE		L	DIN PN10		
IN	DN		D	D1	n-ød
1 1/4	32	95	140	100	4-18
1 1/2	40	95	150	110	4-18
2	50	105	165	125	4-18
2 1/2	65	115	185	145	4-18
3	80	135	200	160	4-18
4	100	150	220	180	8-18
5	125	165	250	210	8-18
6	150	180	285	240	8-23
8	200	210	340	295	8-23
10	250	230	395	350	12-23
12	300	245	445	400	12-23
14	350	255	505	460	16-23
16	400	255	565	515	16-27
18	450	255	615	565	20-27
20	500	255	670	620	20-27
24	600	260	780	725	20-30


Working Pressure(Mpa)	1.6
Bursting Pressure(Mpa)	3
Angle of Deflection	15°
Vacuity Kpa(mmHg)	86.7(650)
Applicable Temp	-15~115℃
Applicable Media	Air,Compressed, Water,Weak Acid,Alkali,etc

SIZE		L	DIN PN16		
IN	DN		D	D1	n-ød
1 1/4	32	95	140	100	4-18
1 1/2	40	95	150	110	4-18
2	50	105	165	125	4-18
2 1/2	65	115	185	145	4-18
3	80	135	200	160	8-18
4	100	150	220	180	8-18
5	125	165	250	210	8-18
6	150	180	285	240	8-23
8	200	210	340	295	12-23
10	250	230	405	355	12-27
12	300	245	460	410	12-27
14	350	255	520	470	16-27
16	400	255	580	525	16-30
18	450	255	640	585	20-30
20	500	255	715	650	20-33
24	600	260	840	770	20-36





J111 TWIN SPHERE CONNECTOR WITH THREAD

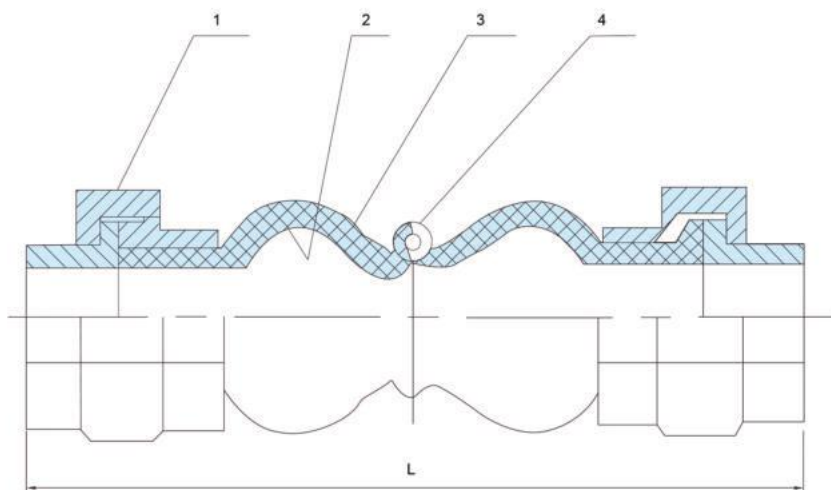

Working Pressure(Mpa)	1.6
Bursting Pressure(Mpa)	3
Angle of Deflection	15°
Vacuity Kpa(mmHg)	86.7(650)
Applicable Temp	-15~115℃
Applicable Media	Air, Compressed, Water, Weak Acid, Alkali, etc

STANDARD MATERIALS OF MAIN PARTS

ITEM	PART NAME	MATERIAL
1	Joint	Cast Iron
2	liner	NBR
3	Farm	Stainless
4	Steel Wire	CS


DIMENSIONS

SIZE		L	Axial displacement		Lateral displacement
IN	DN		stretch	compression	
1/2	15	180	5~6	22	22
3/4	20	180	5~6	22	22
1	25	180	5~6	22	22
1 1/4	32	200	5~6	22	22
1 1/2	40	210	5~6	22	22
2	50	220	5~6	22	22
2 1/2	65	245	5~6	22	22



BALL VALVE

J888 BALL VALVE

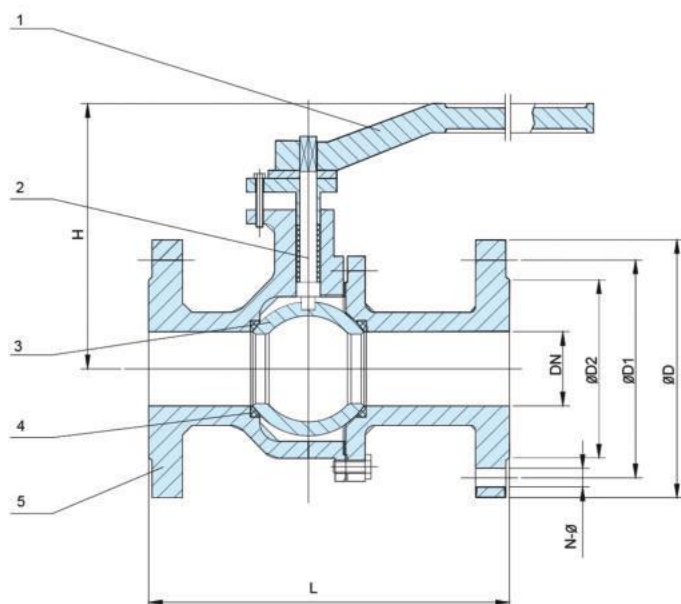

STANDRD MATERIALS OF MAIN PARTS

NO.	PART NAME	MATERIAL
1	Handle	Cast Iron, Ductile Iron
2	Stem	Carbon Steel, Stainless Steel
3	Ball	Cast Iron, Ductile Iron
4	Seal Ring	PTFE
5	Body	Cast Iron, Ductile Iron

DIMENSIONS Ball Valve

DN	D	L	H	D2	D1	N-Ø
20	105	150	98	55	75	4-14
25	115	160	103	65	85	4-14
32	135	165	103	78	100	4-18
40	145	180	123	85	110	4-18
50	160	203	130	100	125	4-18
65	180	222	145	120	145	4-18
80	195	241	178	135	160	8-18
100	215	305	189	155	180	8-18
125	245	356	226	185	210	8-18
150	280	394	237	210	240	8-23
200	335	457	370	265	295	8-23

DIMENSION TABLE

DN	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
L	80	80	84	93	106	108	112	127	140
B	65	75	85	100	110	125	145	160	180(190)
H	70	75.5	80	93	96	105.5	129	129	151
D	160	160	175	175	185	185	185	185	229
n-Ø	4-Φ14				4-Φ18		(4-Φ18) 8-Φ18	(8-Φ18)	(8-Φ18) 8-Φ22




- 1. two-slice construction, load-bearing blowout prevention stem, full-bore design, reduced resistance of fluid.
- 2. The surface and internal of valve body are with epoxy resin coating layer.
- 3. Stainless steel stem ensure its operation will not be affected by side thrust caused by high-pressure fluid.
- 4. Stainless steel valve ball reduced parts galling and prolonged service life.
- 5. PTFE valve seat, adjustable packing nut.
- 6. two-slice construction permits easy repairing; PTFE valve seat and PTFE packing rod, after removal of valve bonnet assemblies, can be repaired rapidly. Minor seat damage can be removed by lapping.



J999 FOOT VALVE (DIN PN16)



- Available Medium: Water
- Working Temperature: $\leq 150^{\circ}\text{C}$
- Flange Dimensions: DIN2532/2533

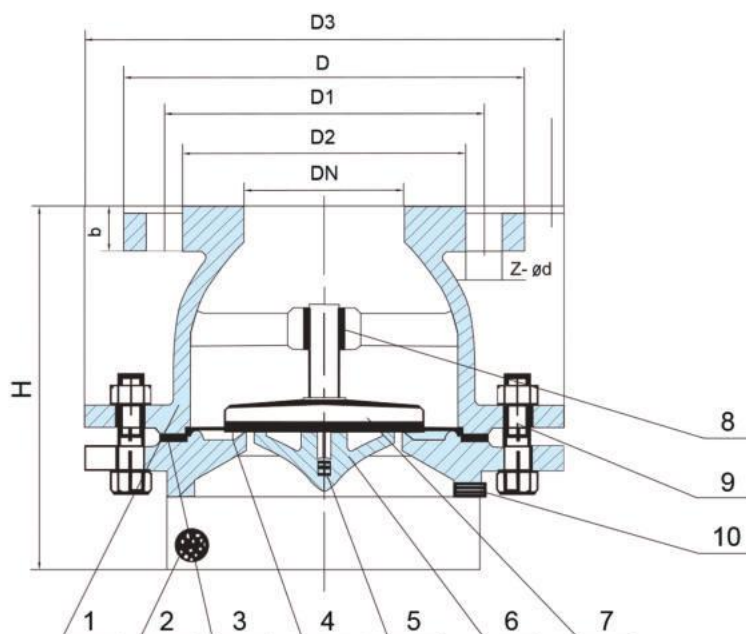

DETAILS


ITEM	PARTS NAME	MATERIAL
1	Body	Cast Iron
2	Screen	Stainless Steel
3	Gasket	Graphite
4	Flange Plate	Cast Iron
5	Stud Bolt	Carbon Steel
6	Lock Block	Cast Iron
7	Disc	Cast Iron+Rubber
8	Valve Guide	Brass
9	Bolt Nut	Carbon
10	Screw	Carbon

DN	D	D1	D2	D3	b	Z-ød	f	H	KG
40	150	110	88	170	18	4-18	3	137	
50	165	125	102	180	20	4-18	3	157	9.6
65	185	145	122	200	20	4-18	3	172	11.9
80	200	160	138	240	22	8-18	3	186	15.6
100	220	180	158	270	22	8-18	3	245	21.6
125	250	210	188	310	24	8-18	3	263	28.5
150	285	240	212	360	24	8-23	3	343	42.8
200	340	295	268	440	26	12-23	3	421	65.3
250	405	355	320	520	28	12-27	3	469	83.3
300	460	410	378	590	28	12-27	4	609	129.2
350	520	470	438	620	30	16-27	4	785	148.2



DISMANTLING JOINT

J101 DISMANTLING JOINT

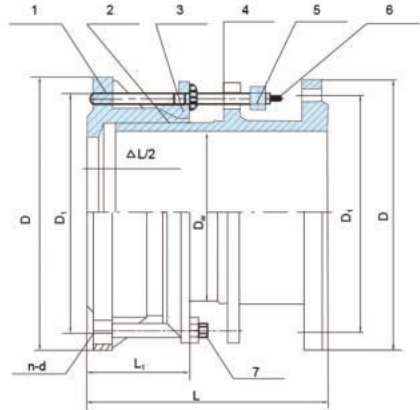

No	Name	Quantity	Material
1	Body	1	QT400-15, Q235A, ZG230-450, 20
2	Gasket	1	NBR
3	Cover	1	QT400-15, Q235A, ZG230-450, 20
4	Limited short pipe	1	Q234A, 20, 16Mn
5	Nut	4n	Q235A, 20, 1Cr18Ni9Ti
6	Long Stud	n	Q235A, 35, 1Cr18Ni9Ti
7	bolt	n	Q235A, 35, 1Cr18Ni9Ti

THE SIZE MEETS STANDARD GB/T12456-2002

Nominal diameter DN	External diameter of pipe DW	Length		Compensation ΔL		Flange connecting dimension				
		L	L1	D	D1	0.6Mpa		1.0Mpa		
						n-do	D	D1	n-do	
65	76					160	130	4- Φ 14	185	145
80	89	340		105	50	190	150	4- Φ 18	200	160
100	108					210	170	4- Φ 18	220	180
125	133					240	200	8- Φ 18	250	210
150	159					265	225	8- Φ 18	285	240
200	219	340		105	50	321	280	8- Φ 18	340	295
250	273					375	335	12- Φ 18	395	350
300	325					440	395	12- Φ 22	445	400
350	377					490	445	16- Φ 22	505	460
400	426					540	495	16- Φ 22	565	515
450	480	350		130	65	595	550	16- Φ 22	615	565
500	530					645	600	20- Φ 22	670	620
600	630					755	705	20- Φ 26	780	725
700	720					860	810	24- Φ 26	895	840
800	820					95	920	24- Φ 30	1015	950
900	920					1075	1020	24- Φ 30	1115	1050
1000	1020					1175	1120	28- Φ 30	1230	1160
1200	1220					1405	1340	32- Φ 33	1455	1380
1400	1420					1630	1500	36- Φ 36	1675	1590
1500	1520	590		220	130	1730	1660	36- Φ 36	1675	1590
1600	1620					1830	S	40- Φ 36	1915	1820
1810	1820					2045	1970	44- Φ 40	2115	2020
2000	2020					2265	2180	48- Φ 42	2325	2230
2200	2220					2475	2390	52- Φ 42	2550	2440
2400	2420					2685	2600	56- Φ 42	2760	2650
2600	2620					2905	2810	60- Φ 48	2960	3070
2800	2820					3115	3020	64- Φ 48	3180	3290
3000	3020					3315	3220	68- Φ 48	3405	
3200	3220	600		240	140	3525	3430	72- Φ 48		
3400	3420					3735	3640	76- Φ 48		
3600	3620					3970	3860	80- Φ 56		

GB/T12456-2002 Note: The size meets standard GB/T12456-2002



- Ductile Iron GGG50, GJS500-7, GGG40
- Size: DN50-DN2000
- Bolts and Nuts: Galvanized Steel / Zinc Plated Steel
- Pressure: PN10/16/25



JEMI VALVES



JEMI VALVES

3rd Floor 82 King Street

Manchester MZYWQ

United Kingdom

www.jemivalves.com

Mail: sales@jemivalves.com

Authorized Distributor:

Hotline Trading LLC

P.O.Box: 120866, Dubai-UAE

www.hotlintradingllc.com

Mail: mauel@hltllc.com

Tel.: +971 4 2582117